

DX 38 Spike

HIGHLIGHTING AND ILLUMINATING SPACES

The Dx projector family stands out for its extraordinary versatility, thanks to a range of accessories that make it ideal for various applications. Dx projectors are suitable for installations on solid surfaces, such as floors, ceilings, and walls, as well as for ground installations using stakes.

Made from high-quality aluminum, turned, anodized, and painted with a diffusing glass fixed with silicone adhesive to ensure IP protection, they are equipped with power LEDs.

Their adjustability, combined with low-luminance lighting and refined finishes, guarantees excellent aesthetic and functional performance in any setting.

Both the 38 mm and 54 mm models can be used as projectors, by directly attaching the bracket or available in the versions with a stem.

The DX 38 is the smallest spot projector, powered by 24V low voltage, and is available in 3 different heights (60 mm, 160 mm, 500 mm) for installation on solid surfaces with a base, or in the ground with the spike version. It is also offered with an integrated power supply in the specific version with a base (92x59 mm).

The DX54 is available in the 24V version or with an integrated 220-240V power supply and in 3 heights (70 mm, 170 mm, 510 mm); for installation on solid surfaces with the version with a base or on the ground with the spike version.

La famiglia di proiettori Dx si distingue per la sua straordinaria versatilità, grazie a una gamma di accessori che la rende ideale per diverse applicazioni.

I proiettori Dx sono adatti per installazioni su superfici solide, come pavimenti, soffitti e pareti, oltre che per installazioni a terra grazie all'uso del picchetto.

Realizzato in alluminio di primaria qualità, tornito, anodizzato e verniciato con vetro diffusore fissato con collante silconico a garantirne la tenuta IP, equipaggiato da power led.

La loro orientabilità, combinata con un'illuminazione a bassa luminanza e le raffinate finiture, garantisce un'eccellente resa estetica e funzionale in qualsiasi contesto. Sia il modello 38mm che il 54mm sono utilizzabili come proiettore, fissando direttamente la staffa oppure disponibili nelle versioni su stelo.

DX 38 è lo spot più piccolo, alimentato 24V bassa tensione è disponibile in 3 altezze differenti (h.60mm, h.160mm, h.500mm) per installazione su superfici solide nella versione con basetta o nel terreno per la versione con picchetto.

Proposto anche con alimentatore integrato nella versione specifica con base (92x59mm).


DX54 disponibile in versione 24V o con alimentatore integrato nel corpo 220-240V e in 3 altezze (h.70mm, h.170mm, h.510mm); per installazione su superfici solide nella versione con basetta o nel terreno la versione con picchetto.





Dx Ø38 Stem Spike h.60

18° | 36°



Available finishes:



Light Source power led
Supply 24V
Dimmer PWM
CRI ≥80
IP rating IP65
Electrical Class III
Application ground
Diffuser transparent glass

Power 24V 2Wled - 3We
Led Colour temp. 2700K / 3000K




		fascio	lm	aluminium	bronze	black	green
2700K 2Wled 3We	24V	▲ 18°with honeycomb	98	900432056	900432059	900432057	9004320516
		▲ 36°with honeycomb	74	900432086	900432089	900432087	9004320816
		▲ 18°without honeycomb	103	900432246	900432249	900432247	9004322416
		▲ 36°without honeycomb	222	900432276	900432279	900432277	9004322716

		fascio	lm	aluminium	bronze	black	green
3000K 2Wled 3We	24V	▲ 18°with honeycomb	103	900412056	900412059	900412057	9004120516
		▲ 36°with honeycomb	78	900412086	900412089	900412087	9004120816
		▲ 18°without honeycomb	178	900412246	900412249	900412247	9004122416
		▲ 36°without honeycomb	234	900412276	900412279	900412277	9004122716

Dx Ø38 Stem Spike h.160

18° | 36°



Available finishes:



Light Source power led
Supply 24V
Dimmer PWM
CRI ≥80
IP rating IP65
Electrical Class III
Application ground
Diffuser transparent glass

Power 24V 2Wled - 3We
Led Colour temp. 2700K / 3000K




		fascio	lm	aluminium	bronze	black	green
2700K 2Wled 3We	24V	▲ 18°with honeycomb	98	900432066	900432069	900432067	9004320616
		▲ 36°with honeycomb	74	900432096	900432099	900432097	9004320916
		▲ 18°without honeycomb	103	900432256	900432259	900432257	9004322516
		▲ 36°without honeycomb	222	900432286	900432289	900432287	9004322816

		fascio	lm	aluminium	bronze	black	green
3000K 2Wled 3We	24V	▲ 18°with honeycomb	103	900412066	900412069	900412067	9004120616
		▲ 36°with honeycomb	78	900412096	900412099	900412097	9004120916
		▲ 18°without honeycomb	178	900412256	900412259	900412257	9004122516
		▲ 36°without honeycomb	234	900412286	900412289	900412287	9004122816



Dx Ø38 Stem Spike h.500

18° | 36°

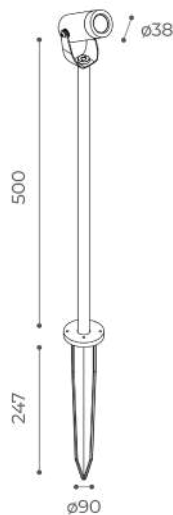

Available finishes:



Light Source power led
Supply 24V
Dimmer PWM
CRI ≥80
IP rating IP65
Electrical Class III
Application ground
Diffuser transparent glass

Power 24V 2Wled - 3We
Led Colour temp. 2700K / 3000K




		fascio	lm	aluminium	bronze	black	green
2700K 2Wled 3We	24V	▲ 18°with honeycomb	98	900432076	900432079	900432077	9004320716
		▲ 36°with honeycomb	74	900432106	900432109	900432107	9004321016
		▲ 18°without honeycomb	103	900432266	900432269	900432267	9004322616
		▲ 36°	222	900432296	900432299	900432297	9004322916

		fascio	lm	aluminium	bronze	black	green
3000K 2Wled 3We	24V	▲ 18°with honeycomb	103	900412076	900412079	900412077	9004120716
		▲ 36°with honeycomb	78	900412106	900412109	900412107	9004121016
		▲ 18°without honeycomb	178	900412266	900412269	900412267	9004122616
		▲ 36°without honeycomb	234	900412296	900412299	900412297	9004122916






ACCESSORIES




Power supply 8V 110-2240V IP54
44x46x26mm

code **9037**




Power supply 24V DC 70W IP67
267x79x52mm

code **9049**




Power supply 24V 16Watt IP20
118x52x26mm

code **9006**




Power supply 24V DC 150W IP67
267x79x52mm

code **9057**




Power supply 24V 20Watt IP20
103x67x21mm

code **9007**




SPD CL.1 12KV 320V UC max
40x57x20mm

code **9058**




Power supply 24V 50Watt IP20
190x60x36mm

code **9008**




Tube Frame
Ø38x25mm
colour **Black**

code **90117**



Power supply 16W 110-240V IP65
125x61x31mm

code **9059**



Eyelid Frame
Ø38x39mm
colour **Black**

code **90127**

ACCESSORIES:

code **9037 / 9006 / 9007 / 9008 / 9059 / 9049 / 9057 / 9058 / 90117 / 90127**