

# Divar Recessed

## ILLUMIANTING MEANS GIVING PLACE

Divar is a compact wall-mounted lighting fixture, available in single or dual emission and in two different sizes.

Made of die-cast and extruded aluminum with cathodolysis treatment and a layer of polyester powder coating, it is resistant to outdoor environments.

The tempered and silk-screened glass diffusers are bonded using a robotic system to ensure IP protection.

It features recessed optics and is equipped with a low-luminance screen to minimize glare.

The Power LED model comes with a transparent, silk-screened tempered glass diffuser, while the Mid-power LED model is provided with sandblasted glass to ensure uniform light emission.

In the 'recessed' version, the front frame is made of white-painted stainless steel, and installation is carried out using stainless steel springs for false ceilings, or alternatively with a casing for solid walls.

*Divar è un apparecchio per installazione a parete compatto, disponibile in mono o bi-emissione in due diverse misure.*

*In alluminio pressofuso ed estruso trattamento di catodolisi e strato di vernice di polvere di poliestere resistente agli ambienti esterni, i diffusori in vetro temprato e serigrafato sono incollati tramite sistema robotico a garanzia della tenuta IP.*


*Caratterizzato da ottica arretrata e dotato di schermo a bassa luminanza per ridurre al massimo l'abbagliamento.*

*Per il modello con Power Led il diffusore è in vetro serigrafato trasparente temprato, mentre il modello con Mid-power Led viene fornito con vetri sabbiati per garantire un'emissione luminosa omogenea.*

*Nella versione "recessed" la ghiera frontale è realizzata in acciaio INOX verniciato bianco, l'installazione avviene mediante delle molle in acciaio inox per i controsoffitti o in alternativa con casafirma per il muro pieno*



# Divar Recessed

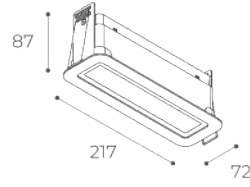

Available finishes:



white

**Light Source**  
**Supply**  
**Dimmer**  
**CRI**  
**IP rating**  
**Electrical Class**  
**Application**  
**Diffuser**

power led / mid power led  
 220-240V  
 upon request  
 ≥80  
 IP65  
 II  
 ceiling  
 transparent glass / sandblasted

**Power**

**Led Colour temp.**

220-240V 12,1Wled 15,4We  
 5,7Wled 7,2 We  
 2700K / 3000K




		lm		white
2700K 12,1Wled 15,4 We	220-240V	19° ▲	1095	901031142
		32° ▲	1118	901031152
		65° ▲	1080	901031162

2700K 5,7 Wled 7,2 We	220-240V	diffused ◐	501	901031172
-----------------------------	----------	------------	-----	-----------

		lm		white
3000K 12,1Wled 15,4 We	220-240V	19° ▲	1153	901011142
		32° ▲	1177	901011152
		65° ▲	1137	901011162

3000K 5,7 Wled 7,2 We	220-240V	diffused ◐	527	901011172
-----------------------------	----------	------------	-----	-----------


## ACCESSORIES



*Metal box for concrete installation*  
385x162x125mm

code **9079**

---

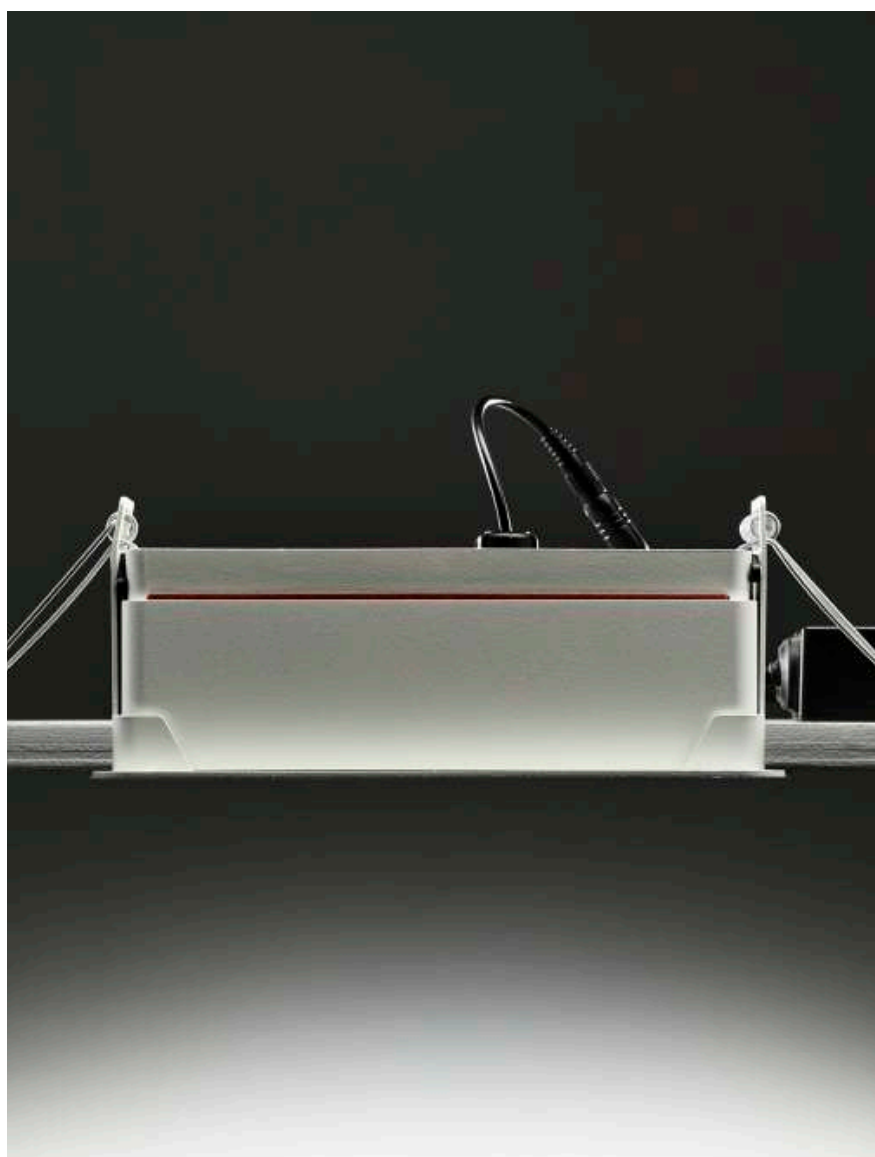

ACCESSORIES:  
code **9079**