

Lightsaber Mid Power LED

**IT IS HARD TO IMAGINE SOMETHING MORE BEAUTIFUL
THAN THE TURNING UP OF LIGHT IN THE DARK**

Linear outdoor fixture available in multiple models with 4 standard sizes.

The Mid-power LED version offers soft and medium-wide light beams with power ranges from 8W to 32W, with a low-voltage 24V or 220-240V integrated power supply.

Entirely made of high-quality extruded or die-cast aluminum, treated with cathodization and coated with a layer of polyester powder resistant to outdoor environments.

The transparent tempered glass diffuser is attached to the body with a robotic silicon gluing system.

The structure design, with an external housing for the power supply to manage temperatures, and adjustable fixing brackets on the body, make this linear product easy to use.

Apparecchio lineare per esterni in alluminio verniciato che si compone di molteplici modelli disponibili in 4 misure standard ed equipaggiati con due tipi sorgenti emissive.

La versione Mid-power led offre fasci luminosi morbidi e di media ampiezza con potenze fra gli 8W e i 32W alimentazione a bassa tensione 24V o 220-240V integrata.

La versione Power led offre soluzioni più tecniche, con potenze fra 12W e 50W e ottiche puntuali che comprendono fasci stretti, medi e asimmetrici. Interamente in alluminio estruso o pressofuso di primaria qualità, con trattamento di catodizzazione e rivestito da uno strato di polvere di poliestere resistente agli ambienti esterni.

Il diffusore in vetro temprato trasparente fissato al corpo con sistema robotico con collante silicico.

Lo sviluppo della struttura con alloggiamento esterno dell'alimentatore per il contenimento delle temperature e le staffe di fissaggio regolabili sul corpo rendono questo lineare un prodotto di semplice utilizzo.




diomede







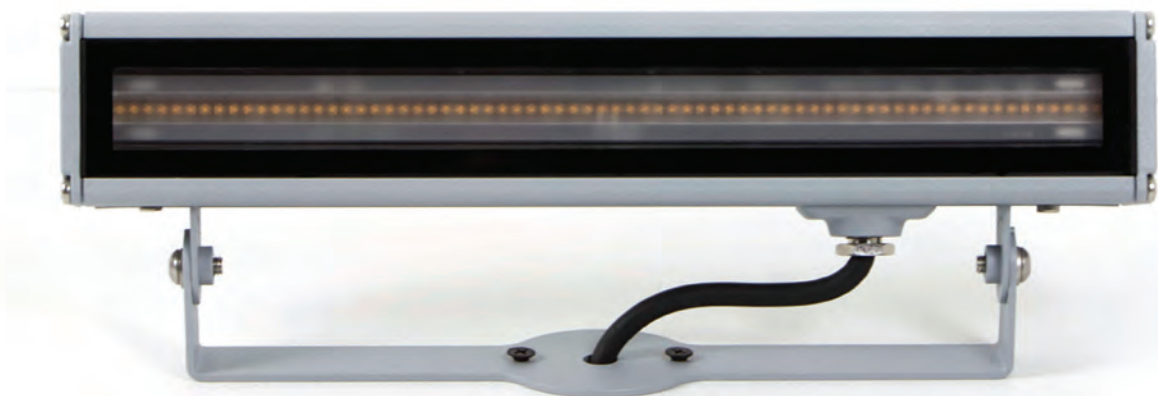


diomede



Lightsaber

mid power led

L306mm

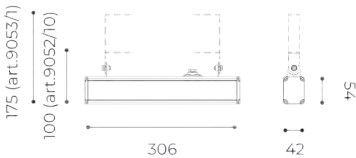

Available finishes:



Light Source	mid power led
Power	24V - 220-240V
Dimmer	not
CRI	≥80
IP Rating	IP65
Electrical Class	I, III
Application	wall, floor, roof
Diffuser	tempered extra-clear glass, silk-screened

Power	24V 8,2Wled
	220-240V 8,2Wled-10,8We
Led Colour temp.	2700K/3000K



			lm	graphite	aluminium
2700K 8,2Wled	24V dc	 44°	669	901732134	901732135
		 80°	566	901732204	901732205
		 31°X88°	554	901732014	901732015
			lm	graphite	aluminium
3000K 8,2Wled	24V dc	 44°	704	901712134	901712135
		 80°	597	901712004	901712005
		 31°X88°	583	901712014	901712015
			lm	graphite	aluminium
2700K 8,2Wled 10,8We	220-240V	 44°	669	901731224	901731225
		 80°	566	901731164	901731165
		 31°X88°	554	901732024	901732025
			lm	graphite	aluminium
3000K 8,2Wled 10,8We	220-240V	 44°	704	901711224	901711225
		 80°	597	901711164	901711165
		 31°X88°	583	901712024	901712025

Lightsaber
mid power led

L584mm

Available finishes:



graphite
aluminium

Light Source mid power led
Power 24V - 220-240V
Dimmer upon request
CRI ≥80
IP Rating IP65
Electrical Class I, III
Application wall, floor, roof
Diffuser tempered extra-clear glass, silk-screened

Power 24V 16,2Wled
220-240V 16,2Wled-17,6We
Led Colour temp. 2700K/3000K




			lm	graphite	aluminium
2700K 16,2Wled	24V dc	44°	1338	901732144	901732145
		80°	1133	901732034	901732035
		31°X88°	1108	901732044	901732045

			lm	graphite	aluminium
3000K 16,2Wled	24V dc	44°	1409	901712144	901712145
		80°	1193	901712034	901712035
		31°X88°	1166	901712044	901712045


			lm	graphite	aluminium
2700K 16,2Wled 17,6We	220-240V	44°	1409	901731234	901731235
		80°	1193	901731174	901731175
		31°X88°	1166	901732054	901732055

			lm	graphite	aluminium
3000K 16,2Wled 17,6We	220-240V	44°	1409	901711234	901711235
		80°	1193	901711174	901711175
		31°X88°	1166	901712054	901712055

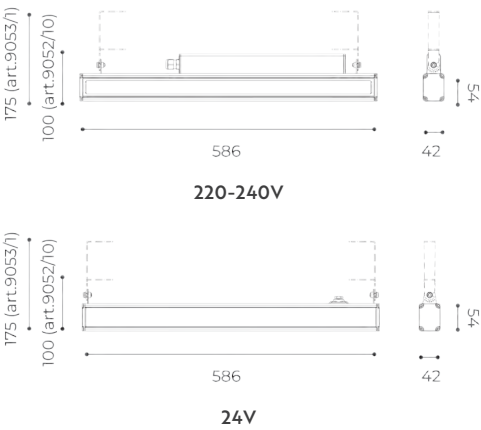

Lightsaber mid power led

L866mm

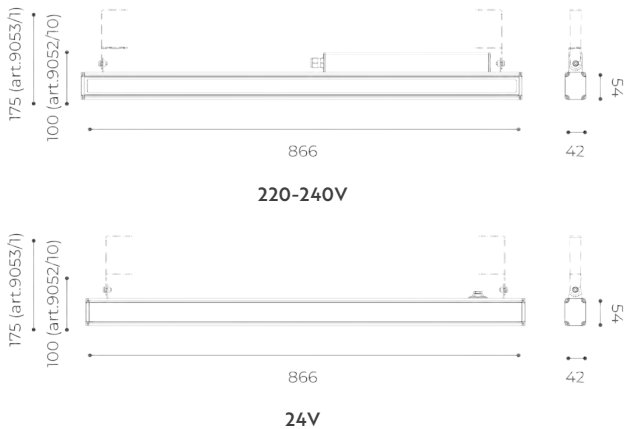

Available finishes:



Light Source	mid power led
Power	24V - 220-240V
Dimmer	upon request
CRI	≥80
IP Rating	IP65
Electrical Class	I, III
Application	wall, floor, roof
Diffuser	tempered extra-clear glass, silk-screened

Power	24V 24Wled 220-240V 24Wled-27,9We
Led Colour temp.	2700K/3000K



			lm	graphite	aluminium
2700K	24V dc	44°	2007	901732154	901732155
24Wled		80°	1698	901732064	901732065
		31°X88°	1662	901732074	901732075

			lm	graphite	aluminium
3000K	24V dc	44°	2112	901712154	901712155
24Wled		80°	1791	901712064	901712065
		31°X88°	1749	901712074	901712075

			lm	graphite	aluminium
2700K	220-240V	44°	2007	901731244	901731245
24Wled		80°	1698	901731184	901731185
27,9We		31°X88°	1662	901731194	901731195

			lm	graphite	aluminium
3000K	220-240V	44°	2112	901711244	901711245
24Wled		80°	1791	901711184	901711185
27,9We		31°X88°	1749	901711194	901711195

Lightsaber
mid power led

L1146mm

Available finishes:



Light Source mid power led
Power 24V - 220-240V
Dimmer upon request
CRI ≥80
IP Rating IP65
Electrical Class I, III
Application wall, floor, roof
Diffuser tempered extra-clear glass, silk-screened

Power 24V 30,7Wled
220-240V 30,7Wled-35,2We
Led Colour temp. 2700K/3000K



			lm	graphite	aluminium
2700K 30,7Wled	24V dc	44°	2676	901732164	901732165
		80°	2264	901732084	901732085
		31°X88°	2216	901732094	901732095


			lm	graphite	aluminium
3000K 30,7Wled	24V dc	44°	2816	901712164	901712165
		80°	2388	901712084	901712085
		31°X88°	2332	901712094	901712095

			lm	graphite	aluminium
2700K 30,7Wled 35,2We	220-240V	44°	2676	901731254	901731255
		80°	2264	901731204	901731205
		31°X88°	2216	901731214	901731215

			lm	graphite	aluminium
3000K 30,7Wled 35,2We	220-240V	44°	2816	901711254	901711255
		80°	2388	901711204	901711205
		31°X88°	2332	901711214	901711215




ACCESSORIES




Brackets kit l 100mm
colour **Aluminium**

code **9050**




Inground installation spike
25x230x247mm
For 300mm model only
colour **Graphite**

code **90614**




Brackets kit l 100mm
colour **Graphite**

code **9052**




Inground installation spike
25x230x247mm
For 300mm model only
colour **Aluminium**

code **90615**



Brackets kit l 175mm
colour **Aluminium**

code **9051**



Brackets kit l 175mm
colour **Graphite**

code **9053**

ACCESSORIES:

code **9050 / 9052 / 9051 / 9053 / 90614 / 90615**