

Lightsaber Power LED

**IT IS HARD TO IMAGINE SOMETHING MORE BEAUTIFUL
THAN THE TURNING UP OF LIGHT IN THE DARK**

Linear outdoor fixture available in multiple models with 4 standard sizes

The Power LED version offers more technical solutions, with power ranges from 12W to 50W and precise optics that include narrow, medium, and asymmetric beams.

Entirely made of high-quality extruded or die-cast aluminum, treated with cathodization and coated with a layer of polyester powder resistant to outdoor environments.

The transparent tempered glass diffuser is attached to the body with a robotic silicon gluing system.

The structure design, with an external housing for the power supply to manage temperatures, and adjustable fixing brackets on the body, make this linear product easy to use.

Apparecchio lineare per esterni in alluminio verniciato che si compone di molteplici modelli disponibili in 4 misure standard ed equipaggiati con due tipi sorgenti emissive.

La versione Mid-power led offre fasci luminosi morbidi e di media ampiezza con potenze fra gli 8W e i 32W alimentazione a bassa tensione 24V o 220-240V integrata.


La versione Power led offre soluzioni più tecniche, con potenze fra 12W e 50W e ottiche puntuali che comprendono fasci stretti, medi e asimmetrici. Interamente in alluminio estruso o pressofuso di primaria qualità, con trattamento di catodizzazione e rivestito da uno strato di polvere di poliestere resistente agli ambienti esterni.

Il diffusore in vetro temprato trasparente fissato al corpo con sistema robotico con collante silicico.

Lo sviluppo della struttura con alloggiamento esterno dell'alimentatore per il contenimento delle temperature e le staffe di fissaggio regolabili sul corpo rendono questo lineare un prodotto di semplice utilizzo.





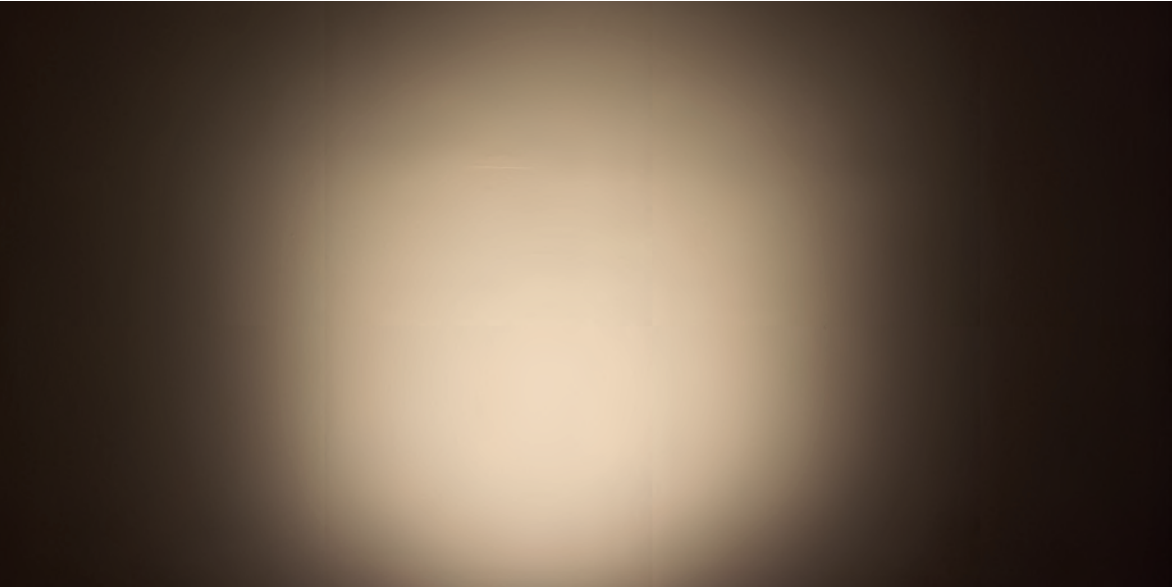

44°



80°




31°x88°

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

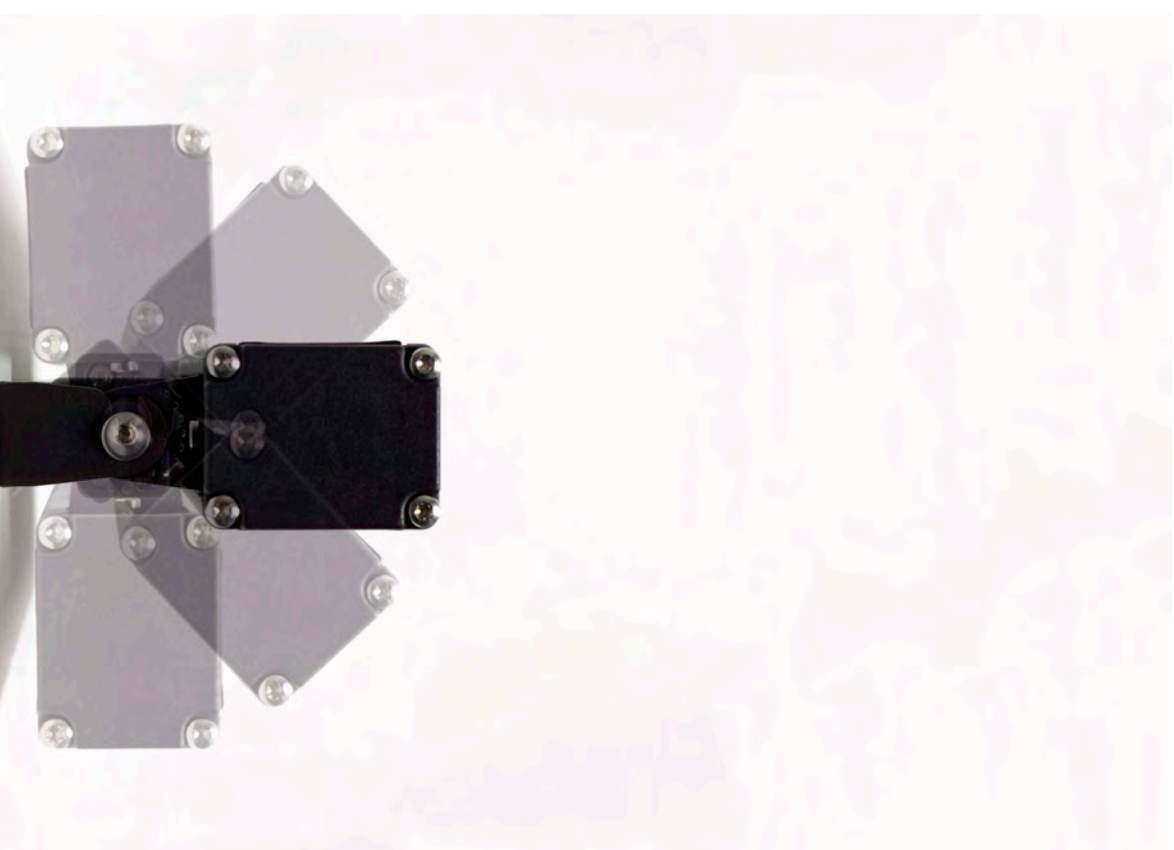


diomede



Lightsaber power led

L306mm

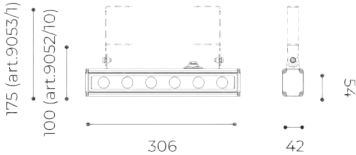

Available finishes:

- graphite
- aluminium

Light Source power led
Power 220-240V
Dimmer not
CRI ≥80
IP Rating IP65
Electrical Class I
Application wall, floor, roof
Diffuser tempered extra-clear glass, silk-screened

Power 220-240V 12Wled - 15,6We
Led Colour temp. 2700K / 3000K



			lm	graphite	aluminium
2700K	220-240V	▲ 14°	1187	901731004	901731005
12Wled		▲ 28°	1233	901731014	901731015
15,6 We		▲ 45°	1148	901731024	901731025
		● 52°x12°	1211	901731034	901731035
			lm	graphite	aluminium
3000K	220-240V	▲ 14°	1249	901711004	901711005
12Wled		▲ 28°	1298	901711014	901711015
15,6 We		▲ 45°	1208	901711024	901711025
		● 52°x12°	1275	901711034	901711035

Lightsaber
power led

L586mm



Available finishes:



Light Source power led
Power 220-240V
Dimmer upon request
CRI ≥80
IP Rating IP65
Electrical Class I
Application wall, floor, roof
Diffuser tempered extra-clear glass, silk-screened

Power 220-240V
24,6Wled - 29We
Led Colour temp. 2700K / 3000K



			lm	graphite	aluminium
2700K	220-240V	▲ 14°	2374	901731044	901731045
24,6Wled		▲ 28°	2467	901731054	901731055
29We		▲ 45°	2296	901731064	901731065
		● 52°x12°	2422	901731074	901711075
			lm	graphite	aluminium
3000K	220-240V	▲ 14°	2499	901711044	901711045
24,6Wled		▲ 28°	2596	901711054	901711055
29We		▲ 45°	2416	901711064	901711065
		● 52°x12°	2677	901711074	901711075

Lightsaber power led

L866mm



Available finishes:

- graphite
- aluminium

Light Source power led
Power 220-240V
Dimmer upon request
CRI ≥80
IP Rating IP65
Electrical Class I
Application wall, floor, roof
Diffuser tempered extra-clear glass, silk-screened

Power 220-240V
36,6Wled - 41,7We
Led Colour temp. 2700K/3000K



				lm	graphite	aluminium
2700K 36,6Wled 41,7We	220-240V		14°	3560	901731084	901731085
			28°	3700	901731094	901731095
			45°	3444	901731104	901731105
			52°x12°	3632	901731114	901731115
				lm	graphite	aluminium
3000K 36,6Wled 41,7We	220-240V		14°	3748	901711084	901711085
			28°	3894	901711094	901711095
			45°	3624	901711104	901711105
			52°x12°	3824	901711114	901711115

Lightsaber
power led

L1146mm



Available finishes:

- graphite
- aluminium


Light Source power led
Power 220-240V
Dimmer upon request
CRI ≥80
IP Rating IP65
Electrical Class I
Application wall, floor, roof
Diffuser tempered extra-clear glass, silk-screened

Power 220-240V
49,1Wled - 53,3We
Led Colour temp. 2700K/3000K




			lm	graphite	aluminium
2700K 49,1Wled 53,3We	220-240V	 14°	4748	901731124	901731125
		 28°	4932	901731134	901731135
		 45°	4592	901731144	901731145
		 52°x12°	4843	901731154	901731155
			lm	graphite	aluminium
3000K 49,1Wled 53,3We	220-240V	 14°	4998	901711124	901711125
		 28°	5192	901711134	901711135
		 45°	4832	901711144	901711145
		 52°x12°	5098	901711154	901711155

ACCESSORIES




Brackets kit l 100mm
colour **Aluminium**

code **9050**




Inground installation spike
25x230x247mm
For 300mm model only
colour **Graphite**

code **90614**




Brackets kit l 100mm
colour **Graphite**

code **9052**




Inground installation spike
25x230x247mm
For 300mm model only
colour **Aluminium**

code **90615**



Brackets kit l 175mm
colour **Aluminium**

code **9051**



Brackets kit l 175mm
colour **Graphite**

code **9053**

ACCESSORIES:

code **9050 / 9052 / 9051 / 9053 / 90614 / 90615**