

Lucignolo

ESSENTIAL LIGHT AND PURE LINES BLEND WITH TIMELESS ALLURE

Elegant fixture for installation on a solid wall or floor surface. With soft yet focused light emission, Lucignolo aspires to be not only a functional fixture but also a decorative element, thanks to the range of painted aluminium or steel covers with elegant PVD finishes.

This treatment offer customers the chance to experiment with particularly refined colours such as gold and bronze in glossy or matt finishes.

The structure is made of die-cast aluminium, treated with electrophoresis, and coated with polyester powder. Inox model is the only suitable for floor installation.

Equipped with mid power led in two colours 2700K and 3000K.

Elegante apparecchio per l'installazione su superficie solida a parete o pavimento.

Dall'emissione luminosa morbida ma allo stesso tempo puntuale, Lucignolo aspira ad essere oltre che un apparecchio di funzione anche un elemento decorativo, grazie alla gamma di cover in alluminio verniciate o in acciaio con eleganti finiture PVD, trattamento che offre la possibilità di osare con colori particolarmente ricercati come l'oro e il bronzo in finitura lucida o opaca.

La struttura è in alluminio pressofuso, trattato con bagno di cataforesi e verniciato con polvere poliestere. Il modello in INOX è l'unico della gamma installabile a pavimento.

Equipaggiato mid power led in due colorazioni 2700K e 3000K.








diomede






Lucignolo

mono emission



Available finishes:

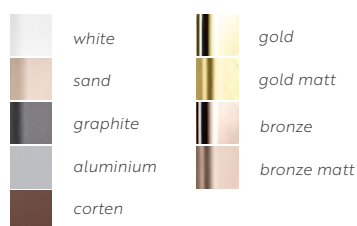**Light Source****Supply****Dimmer****CRI****Electrical Class****IP rating****Application****Diffuser**

mid power led

24V / 220-240V

only 24V (PWM)

≥80

II, III

65

wall

polycarbonate diffuser

Power

24V 3Wled

220-240V 3Wled - 4,7We

Led Colour temp.

2700K/3000K



2700K 24V III lm 294
3Wled

white	sand	graphite	aluminium	corten	gold	gold matt	bronze	bronze matt
902232002	902232003	902232004	902232005	902232008	9022320012	9022320013	9022320014	9022320015

3000K 24V III lm 303
3Wled

white	sand	graphite	aluminium	corten	gold	gold matt	bronze	bronze matt
902212002	902212003	902212004	902212005	902212008	9022120012	9022120013	9022120014	9022120015

2700K 220-240V II lm 294
3Wled / 4,7 We


white	sand	graphite	aluminium	corten	gold	gold matt	bronze	bronze matt
902231002	902231003	902231004	902231005	902231008	9022310012	9022310013	9022310014	9022310015

3000K 220-240V II lm 303
3Wled / 4,7 We


white	sand	graphite	aluminium	corten	gold	gold matt	bronze	bronze matt
902211002	902211003	902211004	902211005	902211008	9022110012	9022110013	9022110014	9022110015

Lucignolo

double emission



Available finishes:

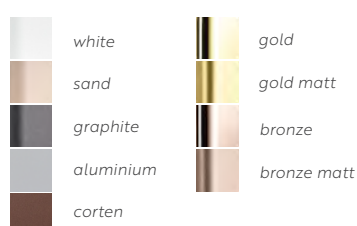

Light Source mid power led
Supply 24V / 220-240V
Dimmer only 24V (PWM)
CRI ≥80
Electrical Class II, III
IP rating 65
Application wall
Diffuser polycarbonate diffuser

Power 24V 2x3Wled
 220-240V 2x3Wled - 8We
Led Colour temp. 2700K/3000K



2700K 24V III lm 588
 2x3Wled

white	sand	graphite	aluminium	corten	gold	gold matt	bronze	bronze matt
902232012	902232013	902232014	902232015	902232018	9022320112	9022320113	9022320114	9022320115

3000K 24V III lm 606
 2x3Wled

white	sand	graphite	aluminium	corten	gold	gold matt	bronze	bronze matt
902212012	902212013	902212014	902212015	902212018	9022120112	9022120113	9022120114	9022120115

2700K 220-240V II lm 588
 2x3Wled / 8 We


white	sand	graphite	aluminium	corten	gold	gold matt	bronze	bronze matt
902231012	902231013	902231014	902231015	902231018	9022310112	9022310113	9022310114	9022310115

3000K 220-240V II lm 606
 2x3Wled / 8 We

white	sand	graphite	aluminium	corten	gold	gold matt	bronze	bronze matt
902211012	902211013	902211014	902211015	902211018	9022110112	9022110113	9022110114	9022110115

Lucignolo Inox

mono emission



Available finishes:



Light Source mid power led
Supply 24V / 220-240V
Dimmer only 24V (PWM)
CRI ≥80
Electrical Class II, III
IP rating 67
Application floor
Diffuser polycarbonate diffuser


Power 24V 3Wled
220-240V 3Wled - 4,7We
Led Colour temp. 2700K/3000K



			lm	inox	
2700K 3 Wled	24V	III	294	Mono emission	902232001
			lm	inox	
3000K 3 Wled	24V	III	303	Mono emission	902212001
			lm	inox	
2700K 4,7 Wled	220-240V	II	294	Mono emission	902231001
			lm	inox	
3000K 4,7 Wled	220-240V	II	303	Mono emission	902211001

Lucignolo Inox

double emission



Available finishes:



inox


Light Source mid power led
Supply 24V / 220-240V
Dimmer only 24V (PWM)
CRI ≥80
Electrical Class II, III
IP rating 67
Application floor
Diffuser polycarbonate diffuser

Power 24V 2x3Wled
220-240V 2x3Wled - 8We
Led Colour temp. 2700K/3000K



			lm		inox
2700K 2x3 Wled	24V	III	588	Double emission	902232011
			lm		inox
3000K 2x3 Wled	24V	III	656	Double emission	902212011
			lm		inox
2700K 8 Wled	220-240V	II	588	Double emission	902231011
			lm		inox
3000K 8 Wled	220-240V	II	656	Double emission	902211011

ACCESSORIES



Recessed box
83,5x108x73mm

code **9019**

