

# Muse U Spot 02 03 Bollard

## **A NEW RHYTHM OVER ALL THINGS, SETTING THE WORLD TO SPIN IN A GRACEFUL DANCE**

A new concept of outdoor lamp, a modular system that offers the possibility of modeling and changing even over time, based on the needs of the user.

Composed of 3 main emission sources: CAPSULE, in anodized aluminum, is proposed as an elegant light source with a modern design which evolves into STILLA, more decorative and easy, and finally SPOT, a projector for more technical installations.

The combination of these three light sources with the various installation accessories offers multiple lighting solutions.

*Una nuova concezione di lampada per esterni, un sistema modulare che offre la possibilità di modellarsi e cambiare anche nel tempo sulla base delle esigenze del fruitore.*

*Composta da 3 fonti emissive principali: CAPSULE, in alluminio anodizzato si propone come una fonte luminosa elegante e dal design moderno per poi evolversi in STILLA, più decorativa e d'atmosfera e per finire SPOT, un proiettore per installazioni più tecniche.*


*La combinazione di queste tre fonti luminose con i vari accessori per l'installazione offre molteplici soluzioni illuminotecniche.*






# Muse Spot 02 Bend-Shape Stem

**h500**

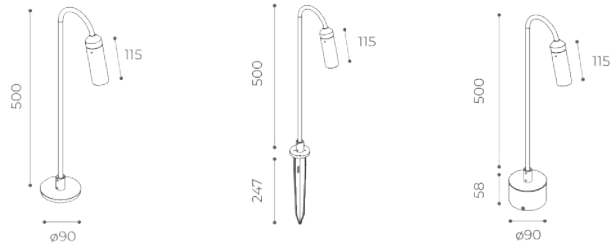

Available finishes:



**Light Source** power led  
**Supply** 24V / 220-240V  
**Dimmer** only 24V (PWM)  
**CRI** ≥80  
**Electrical Class** II, III  
**IP rating** 65  
**Application** ground  
**Diffuser** transparent tempered glass

**Power** 24V 2Wled- 3We  
 220-240V 2Wled - 2,8We  
**Led Colour temp.** 2700/3000K



**WITH BASE**

						lm		black	green
2700K 2Wled 3We	24V	III	▲	18°	98	with honeycomb	9020323111	9020323116	
				18°	169	without honeycomb	9020323211	9020323216	
				36°	75	with honeycomb	9020323511	9020323516	
				36°	224	without honeycomb	9020323611	9020323616	

						lm		black	green
2700K 2Wled 2,8We	220-240V	II	▲	18°	98	with honeycomb	9020313111	9020313116	
				18°	169	without honeycomb	9020313211	9020313216	
				36°	75	with honeycomb	9020313511	9020313516	
				36°	224	without honeycomb	9020313611	9020313616	

						lm		black	green
3000K 2Wled 3We	24V	III	▲	18°	103	with honeycomb	9020123111	9020123116	
				18°	178	without honeycomb	9020123211	9020123216	
				36°	79	with honeycomb	9020123511	9020123516	
				36°	236	without honeycomb	9020123611	9020123616	

						lm		black	green
3000K 2Wled 2,8We	220-240V	II	▲	18°	103	with honeycomb	9020113111	9020113116	
				18°	178	without honeycomb	9020113211	9020113216	
				36°	79	with honeycomb	9020113511	9020113516	
				36°	236	without honeycomb	9020113611	9020113616	


**WITH SPIKE**

						lm		black	green
2700K 2Wled 3We	24V	III	▲	18°	98	with honeycomb	9020323311	9020323316	
				18°	169	without honeycomb	9020323411	9020323416	
				36°	75	with honeycomb	9020323711	9020323716	
				36°	224	without honeycomb	9020323811	9020323816	


						lm		black	green
3000K 2Wled 3We	24V	III	▲	18°	103	with honeycomb	9020123311	9020123316	
				18°	178	without honeycomb	9020123411	9020123416	
				36°	79	with honeycomb	9020123711	9020123716	
				36°	236	without honeycomb	9020123811	9020123816	

# Muse Spot 02 Bend-Shape Stem

h800

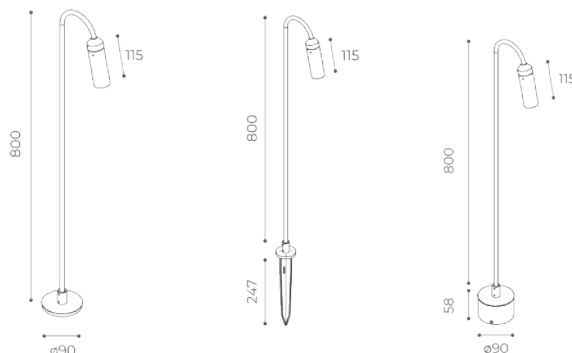

Available finishes:



**Light Source** power led  
**Supply** 24V / 220-240V  
**Dimmer** only 24V (PWM)  
**CRI** ≥80  
**Electrical Class** II, III  
**IP rating** 65  
**Application** ground  
**Diffuser** transparent tempered glass

**Power** 24V 2Wled- 3We  
 220-240V 2Wled - We  
**Led Colour temp.** 2700/3000K



## WITH BASE

				lm		black		green
2700K 2Wled 3We	24V	III	18°	98	with honeycomb	9020323911	9020323916	
			18°	169	without honeycomb	9020324011	9020324016	
			36°	75	with honeycomb	9020324311	9020324316	
			36°	224	without honeycomb	9020324411	9020324416	

				lm		black		green
2700K 2Wled 2,8We	220-240V	II	18°	98	with honeycomb	9020313911	9020313916	
			18°	169	without honeycomb	9020314011	9020314016	
			36°	75	with honeycomb	9020314311	9020314316	
			36°	224	without honeycomb	9020314411	9020314416	

				lm		black		green
3000K 2Wled 3We	24V	III	18°	103	with honeycomb	9020123911	9020123916	
			18°	178	without honeycomb	9020124011	9020124016	
			36°	79	with honeycomb	9020124311	9020124316	
			36°	236	without honeycomb	9020124411	9020124416	

				lm		black		green
3000K 2Wled 2,8We	220-240V	II	18°	103	with honeycomb	9020113911	9020113916	
			18°	178	without honeycomb	9020114011	9020114016	
			36°	79	with honeycomb	9020114311	9020114316	
			36°	236	without honeycomb	9020114411	9020114416	

## WITH SPIKE

				lm		black		green
2700K 2Wled 3We	24V	III	18°	98	with honeycomb	9020324111	9020324116	
			18°	169	without honeycomb	9020324211	9020324216	
			36°	75	with honeycomb	9020324511	9020324516	
			36°	224	without honeycomb	9020324611	9020324616	


				lm		black		green
3000K 2Wled 3We	24V	III	18°	103	with honeycomb	9020124111	9020124116	
			18°	178	without honeycomb	9020124211	9020124216	
			36°	79	with honeycomb	9020124511	9020124516	
			36°	236	without honeycomb	9020124611	9020124616	






# Muse Spot 03 Bend-Shape Stem

**h500**

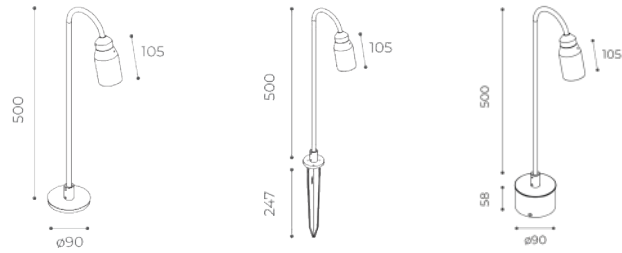

Available finishes:



**Light Source** power led  
**Supply** 24V / 220-240V  
**Dimmer** only 24V (PWM)  
**CRI** ≥80  
**Electrical Class** II, III  
**IP rating** 65  
**Application** ground  
**Diffuser** transparent tempered glass

**Power** 24V 5,8Wled- 6,3We  
 220-240V 5,8Wled - 8,6We  
**Led Colour temp.** 2700/3000K



**WITH BASE**


					lm		black	green
2700K 5,8Wled 6,3We	24V	III	▲ 10°	243	with honeycomb	90203211511	9020321516	
			▲ 10°	405	without honeycomb	90203211611	9020321616	
			▲ 26°	251	with honeycomb	9020324711	9020324716	
			▲ 26°	432	without honeycomb	9020324811	9020324816	
			▲ 52°	135	with honeycomb	9020325111	9020325116	
			▲ 52°	409	without honeycomb	9020325211	9020325216	
2700K 5,8Wled 6,3We	220-240V	II	▲ 10°	243	with honeycomb	90203111511	90203111516	
			▲ 10°	405	without honeycomb	90203111611	90203111616	
			▲ 26°	251	with honeycomb	9020314711	9020314716	
			▲ 26°	432	without honeycomb	9020314811	9020314816	
			▲ 52°	135	with honeycomb	9020315111	9020315116	
			▲ 52°	409	without honeycomb	9020315211	9020315216	
3000K 5,8Wled 6,3We	24V	III	▲ 10°	253	with honeycomb	90201211511	9020121516	
			▲ 10°	422	without honeycomb	90201211611	9020121616	
			▲ 26°	264	with honeycomb	9020124711	9020124716	
			▲ 26°	455	without honeycomb	9020124811	9020124816	
			▲ 52°	142	with honeycomb	9020125111	9020125116	
			▲ 52°	431	without honeycomb	9020125211	9020125216	
3000K 5,8Wled 6,3We	220-240V	II	▲ 10°	253	with honeycomb	90201111511	90201111516	
			▲ 10°	422	without honeycomb	90201111611	90201111616	
			▲ 26°	264	with honeycomb	9020114711	9020114716	
			▲ 26°	455	without honeycomb	9020114811	9020114816	
			▲ 52°	142	with honeycomb	9020115111	9020115116	
			▲ 52°	431	without honeycomb	9020115211	9020115216	

**WITH SPIKE**


					lm		black	green
2700K 5,8Wled 6,3We	24V	III	▲ 10°	243	with honeycomb	90203211711	90203211716	
			▲ 10°	405	without honeycomb	90203211811	90203211816	
			▲ 26°	251	with honeycomb	9020324911	9020324916	
			▲ 26°	432	without honeycomb	9020325011	9020325016	
			▲ 52°	135	with honeycomb	9020325311	9020325316	
			▲ 52°	409	without honeycomb	9020325411	9020325416	
3000K 5,8Wled 6,3We	24V	II	▲ 10°	253	with honeycomb	90201211711	90201211716	
			▲ 10°	422	without honeycomb	90201211811	90201211816	
			▲ 26°	264	with honeycomb	9020124911	9020124916	
			▲ 26°	455	without honeycomb	9020125011	9020125016	
			▲ 52°	142	with honeycomb	9020125311	9020125316	
			▲ 52°	431	without honeycomb	9020125411	9020125416	

# Muse Spot 03 Bend-Shape Stem

h800

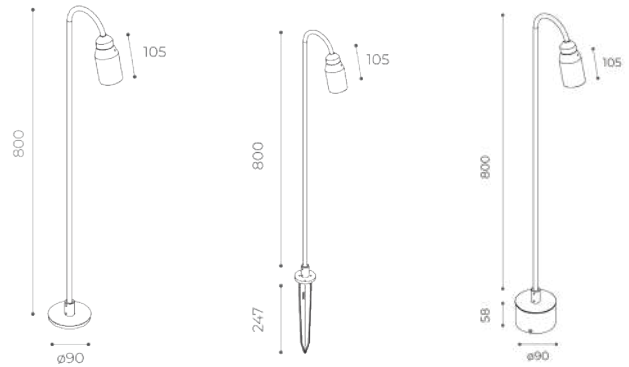

Available finishes:



**Light Source** power led  
**Supply** 24V / 220-240V  
**Dimmer** only 24V (PWM)  
**CRI** ≥80  
**Electrical Class** II, III  
**IP rating** 65  
**Application** ground  
**Diffuser** transparent tempered glass

**Power** 24V 5,8Wled - 6,3We  
 220-240V 5,8Wled - 8,6We  
**Led Colour temp.** 2700/3000K




## WITH BASE

					lm		black	green
2700K 5,8Wled 6,3We	24V	III	▲ 10°	243	with honeycomb	90203211911	90203211916	
			▲ 10°	405	without honeycomb	90203212011	90203212016	
			▲ 26°	251	with honeycomb	9020325511	9020325516	
			▲ 26°	432	without honeycomb	9020325611	9020325616	
			▲ 52°	135	with honeycomb	9020325911	9020325916	
			▲ 52°	409	without honeycomb	9020326011	9020326016	
2700K 5,8Wled 6,3We	220-240V	II	▲ 10°	243	with honeycomb	90203111911	90203111916	
			▲ 10°	405	without honeycomb	90203112011	90203112016	
			▲ 26°	251	with honeycomb	9020315511	9020315516	
			▲ 26°	432	without honeycomb	9020315611	9020315616	
			▲ 52°	135	with honeycomb	9020315911	9020315916	
			▲ 52°	409	without honeycomb	9020316011	9020316016	
3000K 5,8Wled 6,3We	24V	III	▲ 10°	253	with honeycomb	90201211911	90201211916	
			▲ 10°	422	without honeycomb	90201212011	90201212016	
			▲ 26°	264	with honeycomb	9020125511	9020125516	
			▲ 26°	455	without honeycomb	9020125611	9020125616	
			▲ 52°	142	with honeycomb	9020125911	9020125916	
			▲ 52°	431	without honeycomb	9020126011	9020126016	
3000K 5,8Wled 6,3We	220-240V	II	▲ 10°	253	with honeycomb	90201111911	90201111916	
			▲ 10°	422	without honeycomb	90201112011	90201112016	
			▲ 26°	264	with honeycomb	9020115511	9020115516	
			▲ 26°	455	without honeycomb	9020115611	9020115616	
			▲ 52°	142	with honeycomb	9020115911	9020115916	
			▲ 52°	431	without honeycomb	9020116011	9020116016	

## WITH SPIKE


					lm		black	green
2700K 5,8Wled 6,3We	24V	III	▲ 10°	243	with honeycomb	90203212111	90203212116	
			▲ 10°	405	without honeycomb	90203212211	90203212216	
			▲ 26°	251	with honeycomb	9020315711	9020315716	
			▲ 26°	432	without honeycomb	9020325811	9020325816	
			▲ 52°	135	with honeycomb	9020326111	9020326116	
			▲ 52°	409	without honeycomb	9020326211	9020326216	
3000K 5,8Wled 6,3We	24V	III	▲ 10°	253	with honeycomb	90201212111	90201212116	
			▲ 10°	422	without honeycomb	90201212211	90201212216	
			▲ 26°	264	with honeycomb	9020125711	9020125716	
			▲ 26°	455	without honeycomb	9020125811	9020125816	
			▲ 52°	142	with honeycomb	9020126111	9020126116	
			▲ 52°	431	without honeycomb	9020126211	9020126216	

## ACCESSORIES




Power supply 8V 110-2240V IP54  
44x46x26mm

code **9037**




Power supply 24V DC 70W IP67  
267x79x52mm

code **9049**




Power supply 24V 16Watt IP20  
118x52x26mm

code **9006**




Power supply 24V DC 150W IP67  
267x79x52mm

code **9057**




Power supply 24V 20Watt IP20  
103x67x21mm

code **9007**



Anchor bolts  
Ø88x165mm

code **9062**



Power supply 24V 50Watt IP20  
190x60x36mm

code **9008**

### ACCESSORIES:

code **9037 / 9006 / 9007 / 9008 / 9049 / 9057 / 9062**