

# Ster Double Bollard Diffused

## GEOMETRY HIGHLIGHTS SIMPLICITY AND EFFICIENCY

A cone of light designed to illuminate outdoor spaces, with a strong and contemporary design—its geometry highlights simplicity and efficiency.

Ster is a projector available in multiple configurations, suitable for all main applications.

**SPOT GUIO Model:** Available as a wall-mounted projector or as a bollard with single or double emission (H 500 mm, 800 mm), equipped with a GUIO lampholder (lamp not included), or in the SPOT10° version with SORAA® lamp (beam and light-colour accessories to be ordered separately). Die-cast aluminium body, with cathodolysis treatment and polyester powder coating, the base is made of turned aluminium specifically treated for outdoor resistance.

Adjustability:  $\pm 90^\circ$  tilt /  $\pm 355^\circ$  rotation.

The transparent, tempered glass with black silk-screened is attached to the removable frame for access during maintenance.

Direct power supply 220–240V.

**DIFFUSED Model:** Available as a wall fixture, single or double-emission bollard (500 mm and 800 mm), or suspension with rod.

Light source: power LED, 2700K or 3000K, CRI  $\geq 90$ .

The luminaire body and base are made of turned aluminium with cathodolysis treatment and polyester powder coating.

The transparent, tempered glass with black screen-printing is sealed to the body to ensure IP66 protection.

Power supply: 220–240V (phase-cut dimmable for wall version) or 24V with remote driver to be ordered separately.

*Un cono di luce ad illuminare gli spazi esterni, design deciso e attuale, una geometria che esalta semplicità ed efficienza.*

*Ster è un proiettore che si declina in molteplici soluzioni e per tutte le applicazioni principali.*

*Modello SPOT GUIO: in versione proiettore a parete o bollard a singola o doppia emissione (h500mm, 800mm) con portalampada senza lampadina o in versione SPOT10° con lampadina SORAA® (accessori relativi a fascio e colore di luce, da ordinare separatamente). Corpo in pressofusione di alluminio con cataforesi e verniciatura a polvere di poliestere, base in alluminio tornito e trattato appositamente per la resistenza all'esterno. Puntabilità  $\pm 90^\circ$  - orientabilità  $\pm 355^\circ$ . Il vetro trasparente e temprato con serigrafia nera è incollato alla ghiera removibile per la manutenzione del vano.*

*Alimentazione diretta 220-240V.*

*Modello DIFFUSED: versione parete, bollard a singola o doppia emissione da 500mm e 800mm oppure sospensione con tige. Sorgente luminosa power Led nelle colorazioni 2700K e 3000K CRI  $\geq 90$ . Corpo lampada e basetta in alluminio tornito trattato con cataforesi e verniciatura in polvere di poliestere. Il vetro trasparente e temprato con serigrafia nera è incollato al corpo a garanzia della tenuta IP66.*


*Alimentazione 220-240V (dimmabile phase-cut per la versione a parete) o 24V alimentazione remota da predisporre separatamente.*

*Design by Brian Sironi*



# Ster Diffused

## double bollard h800

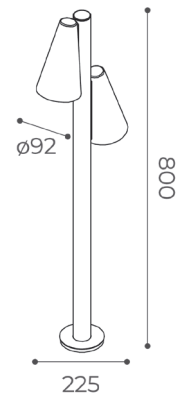

Available finishes:



**Light Source**  
**Supply**  
**CRI**  
**Dimmer**  
**IP rating**  
**Electrical Class**  
**Application**  
**Diffuser**

mid power led  
 220-240V  
 ≥80  
 only 24V (PWM)  
 IP66  
 II, III  
 floor  
 sandblasted glass


**Power** 24V 2x6Wled  
 220-240V 2x6Wled - 14We  
**Led Colour temp.** 2700K / 3000K



						white	sand	graphite	aluminium	corten	green
2700K 2X6Wled 12We	24V	III	diffused	lm		902832092	902832093	902832094	902832095	902832098	9028320916
3000K 2X6Wled 12We	24V	III	diffused	lm		902812092	902812093	902812094	902812095	902812098	9028120916
2700K 2X6Wled 14We	220-240V	II	diffused	lm		902831092	902831093	902831094	902831095	902831098	9028310916
3000K 2X6Wled 14We	220-240V	II	diffused	lm		902811092	902811093	902811094	902811095	902811098	9028110916




## ACCESSORIES




Power supply 16W 110-240V IP65  
125x61x31mm

code **9059**




IP 68 Gel Box

code **9080**




Power supply 24V DC 70W IP67  
267x79x52mm

code **9049**



Anchor bolts  
Ø88x165mm

code **9062**



Power supply 24V DC 150W IP67  
267x79x52mm

code **9057**

ACCESSORIES:

code **9059 / 9049 / 9057 / 9080 / 9062**