

Talon Wall

LIGHT THE BOND BETWEEN SPACE AND INDIVIDUAL

Talon is a compact wall-mounted lighting fixture, available in single or dual emission and in two different sizes.

Made of die-cast and extruded aluminum with cathodoluminescence treatment and a layer of polyester powder coating, it is resistant to outdoor environments.

The tempered and silk-screened glass diffusers are bonded using a robotic system to ensure IP protection.

It features recessed optics and is equipped with a low-luminance screen to minimize glare.

The Power LED model comes with a transparent, silk-screened tempered glass diffuser, while the Mid-power LED model is provided with sandblasted glass to ensure uniform light emission.

In the 'recessed' version, the front frame is made of white-painted stainless steel, and installation is carried out using stainless steel springs for false ceilings, or alternatively with a casing for solid walls.

Talon è un apparecchio per installazione a parete compatto, disponibile con mono o bi-emissione in due diverse misure.

In alluminio pressofuso ed estruso trattamento di catodoluminescenza e strato di vernice di polvere di poliestere resistente agli ambienti esterni, i diffusori in vetro temprato e serigrafato sono incollati tramite sistema robotico a garanzia della tenuta IP.


Caratterizzato da ottica arretrata e dotato di schermo a bassa luminanza per ridurre al massimo l'abbagliamento.

Per il modello con Power Led il diffusore è in vetro serigrafato trasparente temprato, mentre il modello Mid-power Led viene fornito con vetri sabbiati per garantire un'emissione luminosa omogenea.

Nella versione "recessed" la ghiera frontale è realizzata in acciaio INOX verniciato bianco, l'installazione avviene mediante delle molle in acciaio inox per i controsoffitti o in alternativa con casafornitura per il muro pieno.




diomede

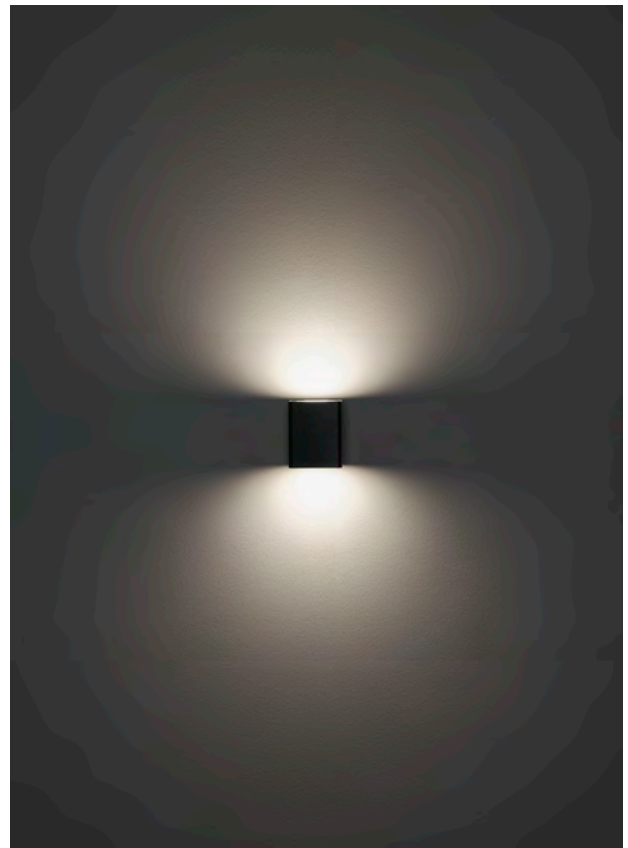

Talon Wall

monoemission



Available finishes:



Light Source power led / mid power led
Supply 220-240V
Dimmer upon request
CRI ≥80
IP rating IP65
Electrical Class I
Application wall
Diffuser transparent glass / sandblasted

Power 220-240V 8,2Wled 10,7We
 4,8Wled 5,8We
Led Colour temp. 2700K / 3000K



			lm	white	sand	graphite	aluminium	corten
2700K 8,2Wled 10,7 We	220-240V	19° ▲	756	901131032	901131033	901131034	901131035	901131038
		32° ▲	760	901131042	901131043	901131044	901131045	901131048
		65° ▲	722	901131052	901131053	901131054	901131055	901131058

2700K 4,8 Wled 5,8 We	220-240V	diffused ☀	481	901131102	901131103	901131104	901131105	901131108
-----------------------------	----------	------------	-----	-----------	-----------	-----------	-----------	-----------

			lm	white	sand	graphite	aluminium	corten
3000K 8,2Wled 10,7 We	220-240V	19° ▲	796	901111032	901111033	901111034	901111035	901111038
		32° ▲	800	901111042	901111043	901111044	901111045	901111048
		65° ▲	760	901111052	901111053	901111054	901111055	901111058

3000K 4,8 Wled 5,8 We	220-240V	diffused ☀	506	901111102	901111103	901111104	901111105	901111108
-----------------------------	----------	------------	-----	-----------	-----------	-----------	-----------	-----------

