

# Talon Wall

**LIGHT THE BOND BETWEEN SPACE AND INDIVIDUAL**

Talon is a compact wall-mounted lighting fixture, available in single or dual emission and in two different sizes.

Made of die-cast and extruded aluminum with cataphoresis treatment and a layer of polyester powder coating, it is resistant to outdoor environments.

The tempered and silk-screened glass diffusers are bonded using a robotic system to ensure IP protection.

It features recessed optics and is equipped with a low-luminance screen to minimize glare.

The Power LED model comes with a transparent, silk-screened tempered glass diffuser, while the Mid-power LED model is provided with sandblasted glass to ensure uniform light emission.

In the 'recessed' version, the front frame is made of white-painted stainless steel, and installation is carried out using stainless steel springs for false ceilings, or alternatively with a casing for solid walls.

*Talon è un apparecchio per installazione a parete compatto, disponibile con mono o bi-emissione in due diverse misure.*

*In alluminio pressofuso ed estruso trattamento di cataforesi e strato di vernice di polvere di poliestere resistente agli ambienti esterni, i diffusori in vetro temprato e serigrafato sono incollati tramite sistema robotico a garanzia della tenuta IP.*

*Caratterizzato da ottica arretrata e dotato di schermo a bassa luminanza per ridurre al massimo l'abbagliamento.*

*Per il modello con Power Led il diffusore è in vetro serigrafato trasparente temprato, mentre il modello Mid-power Led viene fornito con vetri sabbiati per garantire un'emissione luminosa omogenea.*

*Nella versione "recessed" la ghiera frontale è realizzata in acciaio INOX verniciato bianco, l'installazione avviene mediante delle molle in acciaio inox per i controsoffitti o in alternativa con casafirma per il muro pieno.*




# diomede



# Talon Wall

biemission

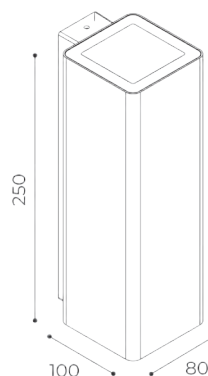

Available finishes:



**Light Source** power led  
**Supply** 220-240 V  
**Dimmer** upon request  
**CRI** ≥80  
**IP rating** IP65  
**Electrical Class** I  
**Application** wall  
**Diffuser** transparent glass

**Power** 220-240V 2x8,2Wled 21,4We  
**Led Colour temp.** 2700K / 3000K



			lm	white	sand	graphite	aluminium	corten
2700K 2x8,2Wled 2x10,7 We	220-240V	19° ▲	2x756	901131002	901131003	901131004	901131005	901131008
		32° ▲	2x760	901131012	901131013	901131014	901131015	901131018
		65° ▲	2x722	901131022	901131023	901131024	901131025	901131028
			lm	white	sand	graphite	aluminium	corten
3000K 2x8,2Wled 2x10,7 We	220-240V	19° ▲	2x796	901111002	901111003	901111004	901111005	901111008
		32° ▲	2x800	901111012	901111013	901111014	901111015	901111018
		65° ▲	2x760	901111052	901111053	901111054	901111055	901111058