

Talon Wall

LIGHT THE BOND BETWEEN SPACE AND INDIVIDUAL

Talon is a compact wall-mounted lighting fixture, available in single or dual emission and in two different sizes.

Made of die-cast and extruded aluminum with cathaphoresis treatment and a layer of polyester powder coating, it is resistant to outdoor environments.

The tempered and silk-screened glass diffusers are bonded using a robotic system to ensure IP protection.

It features recessed optics and is equipped with a low-luminance screen to minimize glare.

The Power LED model comes with a transparent, silk-screened tempered glass diffuser, while the Mid-power LED model is provided with sandblasted glass to ensure uniform light emission.

In the 'recessed' version, the front frame is made of white-painted stainless steel, and installation is carried out using stainless steel springs for false ceilings, or alternatively with a casing for solid walls.

Talon è un apparecchio per installazione a parete compatto, disponibile con mono o bi-emissione in due diverse misure.

In alluminio pressofuso ed estruso trattamento di cataforesi e strato di vernice di polvere di poliestere resistente agli ambienti esterni, i diffusori in vetro temprato e serigrafato sono incollati tramite sistema robotico a garanzia della tenuta IP.

Caratterizzato da ottica arretrata e dotato di schermo a bassa luminanza per ridurre al massimo l'abbagliamento.


Per il modello con Power Led il diffusore è in vetro serigrafato trasparente temperato, mentre il modello Mid-power Led viene fornito con vetri sabbiati per garantire un'emissione luminosa omogenea.

Nella versione "recessed" la ghiera frontale è realizzata in acciaio INOX verniciato bianco, l'installazione avviene mediante delle molle in acciaio inox per i controsoffitti o in alternativa con casaforma per il muro pieno.



Talon Wall

monoemission




Available finishes:



Light Source power led / mid power led
Supply 220-240V
Dimmer upon request
CRI ≥80
IP rating IP65
Electrical Class I
Application wall
Diffuser transparent glass / sandblasted

Power 220-240V 8,2Wled 10,7We
 4,8Wled 5,8We
Led Colour temp. 2700K / 3000K



				lm	white	sand	graphite	aluminium	corten	green
2700K 8,2Wled 10,7 We	220-240V	19°	▲	756	901131032	901131033	901131034	901131035	901131038	901131036
		32°	▲	760	901131042	901131043	901131044	901131045	901131048	901131046
		65°	▲	722	901131052	901131053	901131054	901131055	901131058	901131056

2700K 4,8 Wled 5,8 We	220-240V	diffused	☀	481	901131102	901131103	901131104	901131105	901131108	901131106
-----------------------------	----------	----------	---	-----	-----------	-----------	-----------	-----------	-----------	-----------


				lm	white	sand	graphite	aluminium	corten	green
3000K 8,2Wled 10,7 We	220-240V	19°	▲	796	901111032	901111033	901111034	901111035	901111038	901111036
		32°	▲	800	901111042	901111043	901111044	901111045	901111048	901111046
		65°	▲	760	901111052	901111053	901111054	901111055	901111058	901111056

3000K 4,8 Wled 5,8 We	220-240V	diffused	☀	506	901111102	901111103	901111104	901111105	901111108	901111106
-----------------------------	----------	----------	---	-----	-----------	-----------	-----------	-----------	-----------	-----------



Talon Wall

biemission

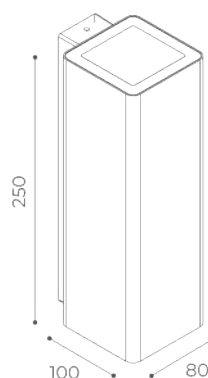

Available finishes:



Light Source power led
Supply 220-240 V
Dimmer upon request
CRI ≥80
IP rating IP65
Electrical Class I
Application wall
Diffuser transparent glass

Power 220-240V 2x8,2Wled 21,4We
Led Colour temp. 2700K / 3000K




			lm	white	sand	graphite	aluminium	corten	green
2700K 2x8,2Wled 2x10,7 We	220-240V	19° ▲	2x756	901131002	901131003	901131004	901131005	901131008	9011310016
		32° ▲	2x760	901131012	901131013	901131014	901131015	901131018	9011310116
		65° ▲	2x722	901131022	901131023	901131024	901131025	901131028	9011310216
			lm	white	sand	graphite	aluminium	corten	green
3000K 2x8,2Wled 2x10,7 We	220-240V	19° ▲	2x796	901111002	901111003	901111004	901111005	901111008	9011110016
		32° ▲	2x800	901111012	901111013	901111014	901111015	901111018	9011110116
		65° ▲	2x760	901111022	901111023	901111024	901111025	901111028	9011110216



Talon Wall

biemission h100





Available finishes:




Light Source mid power led
Supply 220-240V
Dimmer upon request
CRI ≥80
IP rating IP65
Electrical Class I
Application wall
Diffuser transparent glass
Shape rectangular


Power 220-240V 2x4,8Wled 11,6We
Led Colour temp. 2700K / 3000K



			lm	white	sand	graphite	aluminium	corten	green
2700K	220-240V	diffused 	2x481	901131112	901131113	901131114	901131115	901131118	901131116
2x4,8 Wled 2x5,8 We									
			lm	white	sand	graphite	aluminium	corten	green
3000K	220-240V	diffused 	2x506	901111112	901111113	901111114	901111115	901111118	901111116
2x4,8 Wled 2x5,8 We									

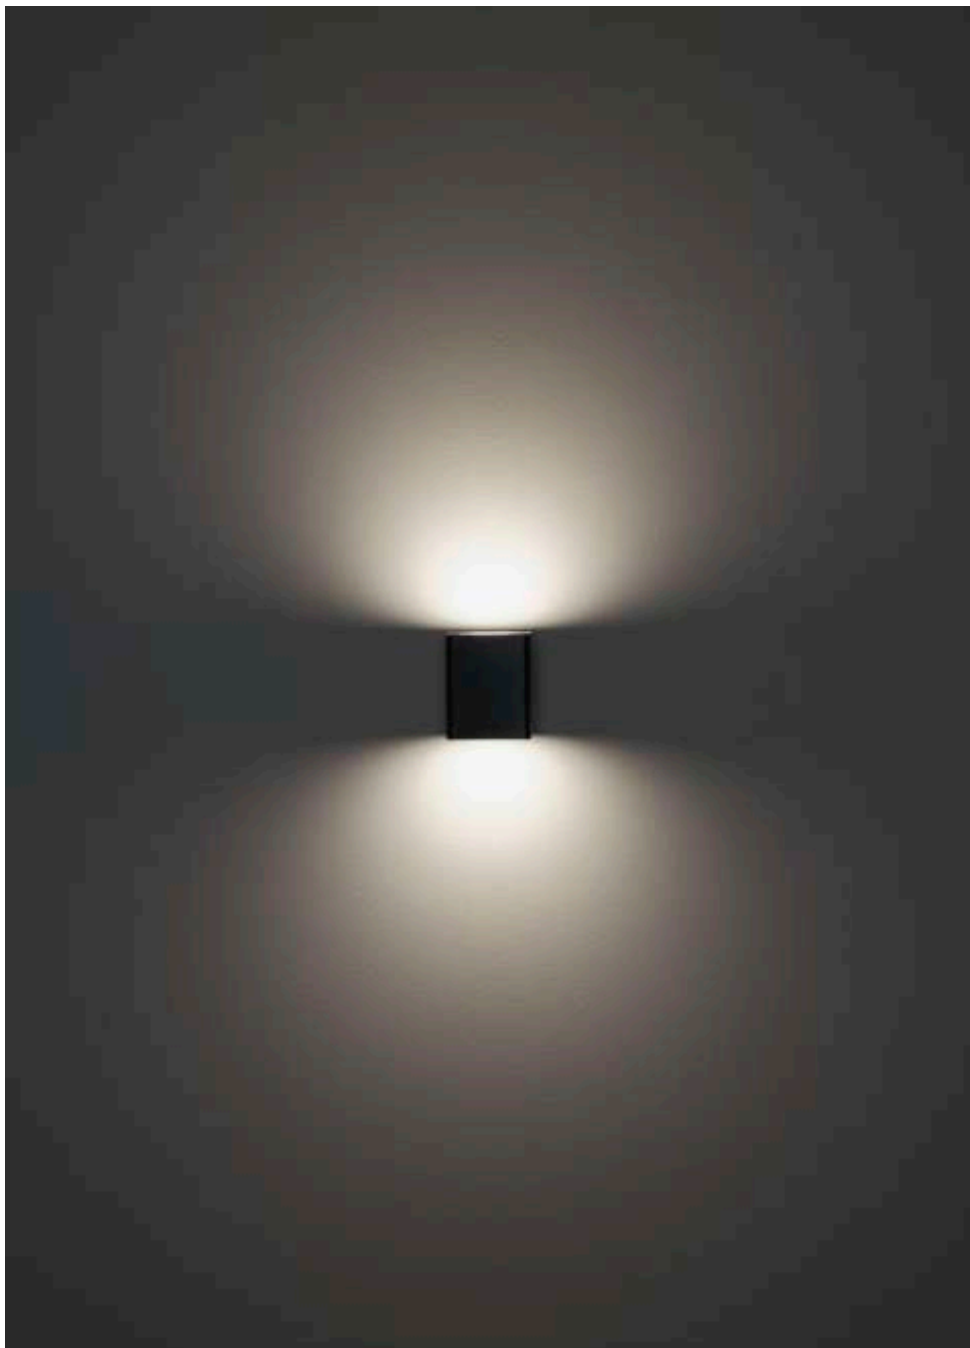

ACCESSORIES



Metal box for concrete installation
262x265x125mm

code **9078**

ACCESSORIES:

code **9078**