

Tree Spot

LIGHT ON A TREE

The alternative to the traditional outdoor installation is the Tree Spot product, a spotlight offered in three different versions, both in terms of size and power.

The models are equipped with a specific mounting base and strap.

The structure is made of machined aluminum, treated with a cataphoresis bath, and coated with polyester powder paint. It features tempered glass that is glued and screen-printed, fixed using robotic technology and silicone adhesive to ensure the IP rating.

All versions are equipped with Power LED and CoB LED in 3000K and 2700K colors.

The power supply is 24V via a standard IP connector; any additional cables should be ordered separately, as well as power supplies and junction boxes

L'alternativa alla classica installazione per esterni è il prodotto Tree Spot, proiettore offerto in tre versioni differenti sia per le dimensioni che per la potenza.


I modelli sono dotati di specifica basetta di fissaggio e cinghia.

Struttura in alluminio tornito, trattato con bagno di cataforesi e verniciato con polvere poliestere, vetro temprato incollato serigrafato, fissato con tecnologia robotica e collante siliconico per garantirne la tenuta IP; tutti equipaggiati da power Led e CoB Led in colorazione 3000K e 2700K.


L'alimentazione è a 24V tramite connettore IP di serie; eventuali cavi accessori sono da ordinare separatamente, come gli alimentatori e scatole di derivazione.



diomede

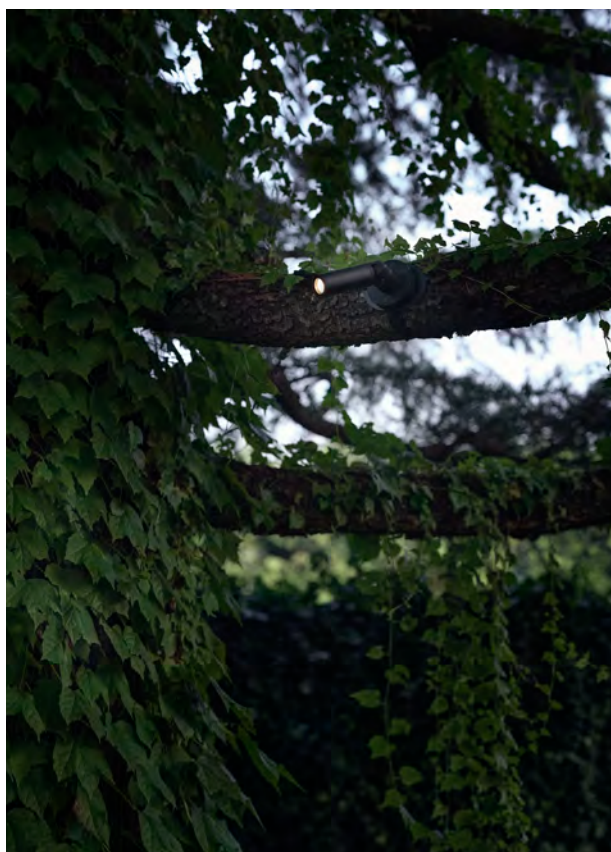

Tree Spot 02



strap lenght l 1000mm

Available finishes:



black

Light Source	power led
Supply	24V
Dimmer	PWM
CRI	≥80
Electrical Class	III
IP rating	65
Application	tree
Diffuser	transparent tempered glass


Power	24V 2Wled- 3We
Led Colour temp.	2700/3000K




					lm	black	
2700K	24V	18°	▲	⊗	with honeycomb	98	9026320011
2Wled		18°	▲		without honeycomb	103	9026320111
3 We		36°	▲	⊗	with honeycomb	74	9026320211
		36°	▲		without honeycomb	222	9026320311

					lm	black	
3000K	24V	18°	▲	⊗	with honeycomb	98	9026120011
2Wled		18°	▲		without honeycomb	103	9026120111
3 We		36°	▲	⊗	with honeycomb	74	9026120211
		36°	▲		without honeycomb	222	9026120311

diomede

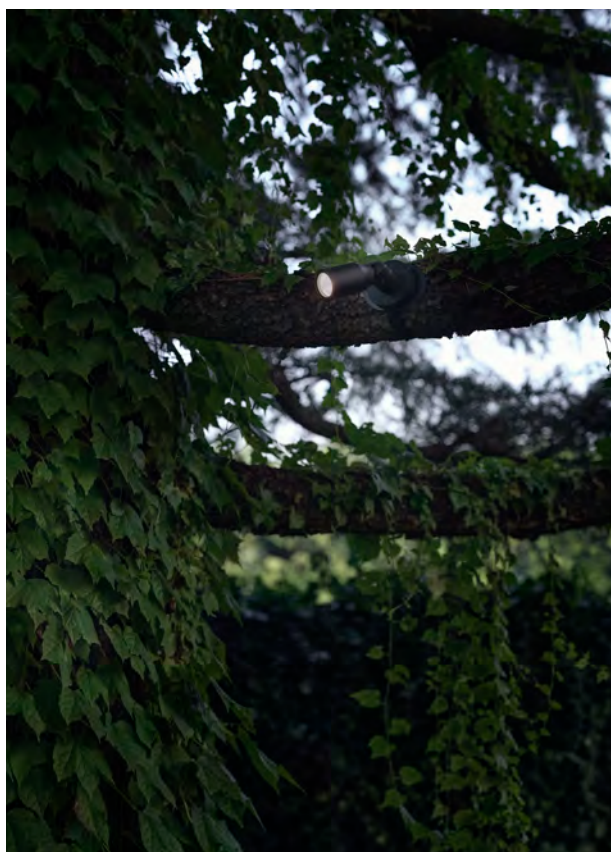

Tree Spot 03



strap lenght l 1000mm

Available finishes:



Light Source	power led
Supply	24V
Dimmer	PWM
CRI	≥80
Electrical Class	III
IP rating	65
Application	tree
Diffuser	transparent tempered glass


Power	24V 5,8Wled- 6,3We
Led Colour temp.	2700/3000K




				lm	black
2700K 24V 5,8Wled 6,3We	10°	▲	with honeycomb	243	9026320411
	10°	▲	without honeycomb	405	9026320511
	26°	▲	with honeycomb	251	9026320611
	26°	▲	without honeycomb	432	9026320711
	52°	▲	with honeycomb	135	9026320811
	52°	▲	without honeycomb	409	9026320911

				lm	black
3000K 24V 5,8Wled 6,3We	10°	▲	with honeycomb	253	9026120411
	10°	▲	without honeycomb	422	9026120511
	26°	▲	with honeycomb	264	9026120611
	26°	▲	without honeycomb	455	9026120711
	52°	▲	with honeycomb	142	9026120811
	52°	▲	without honeycomb	431	9026120911

diomede

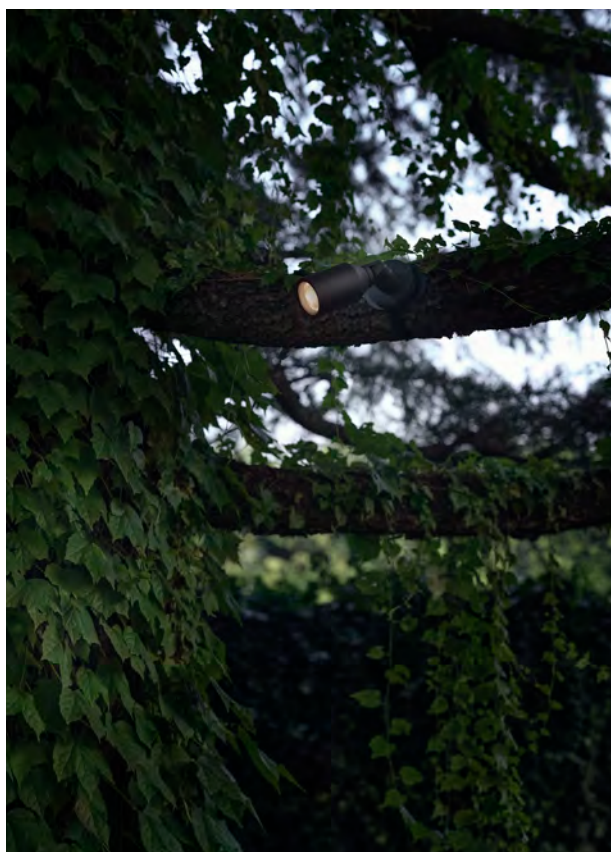

Tree Spot 05



strap length l 1000mm

Available finishes:



black

Light Source

Supply

Dimmer

CRI

Electrical Class

IP rating

Application

Diffuser

power led

24V

PWM

≥80

III

65

tree


transparent tempered glass

Power

Led Colour temp.

24V 9Wled - 10We

2700/3000K




				lm	black
2700K 9Wled 10We	24V	15°		with honeycomb	9026321011
		15°		without honeycomb	9026321111
		36°		with honeycomb	9026321211
		36°		without honeycomb	9026321311
		60°		without honeycomb	9026321411

				lm	black
3000K	24V	15°		with honeycomb	9026121011
9Wled		15°		without honeycomb	860 9026121111
10We		36°		with honeycomb	9026121211
		36°		without honeycomb	857 9026121311
		60°		without honeycomb	805 9026121411

diomede




ACCESSORIES



2 poles cable l 5000mm
incl. female connecton

code **9081**



2 poles cable l 10000mm
incl. female connecton

code **9082**

ACCESSORIES:

code **9081 / 9082**