

Ulisse

BETWEEN WEIGHT AND LIGHTNESS

The pursuit of originality and the authenticity of Made in Italy by Diomede find expression in Ulisse, a new decorative element that seems to emerge from sculpted stone.

Ulisse stands out for its compact and determined character: a solid presence that embraces the light source in a refined dialogue between weight and lightness.

Quarried in Tuscany, from the Cardoso stone caves in the heart of the Apuan Alps Park, the rock is composed of quartz, mica, and chlorite

This extremely durable material resists weathering and impact, making it ideal for outdoor applications.

Its grey-bluish tone, with its subtle lighter veins, together with the textured quality of its stratification, gives Ulisse a timeless elegance in perfect harmony with contemporary architecture.

Available with LED CRI≥80 in 2700K/3000K colour temperature, with integrated or 24V power supply (PWM dimmable), 10W.

La ricerca di originalità e l'autenticità del Made in Italy firmato Diomede trovano espressione in Ulisse, nuovo elemento decorativo che sembra nascere da una roccia scolpita.

Ulisse si distingue per il suo carattere compatto e deciso: una presenza solida che accoglie la sorgente luminosa in un raffinato dialogo tra peso e leggerezza.

Estratta in Toscana, nelle cave di Cardoso nel cuore del Parco delle Alpi Apuane, la roccia che dà forma a Ulisse è composta da quarzo, mica e clorite.

Un materiale straordinariamente resistente, capace di resistere agli agenti atmosferici e agli urti, ideale per applicazioni in esterni.


Il suo colore grigio-bluastro, percorso da leggere venature più chiare, insieme alla matericità della stratificazione, conferisce a Ulisse un'eleganza senza tempo, perfettamente in sintonia con l'architettura contemporanea.

Disponibile con LED CRI≥80 in colorazione 2700K/3000K, alimentazione integrata o 24V (dimmerabile pwm) 10W.



Ulisse

h300



Available finishes:



Light Source mid power led
Supply 24V / 220-240V
Dimmer only 24V (PWM)
CRI ≥80
IP rating IP66
Electrical Class III, I
Application ground
Diffuser sandblasted tempered glass

Power 24V 10Wled / 220-240V 12,6We
Led Colour temp. 2700K / 3000K



lm				
2700K 10Wled 11We	24V	III	444	90273200 M

lm				
3000K 10Wled 11We	24V	III	468	90271200 M

lm				
2700K 10W@230V	220-240V	I	444	90273100 M

lm				
3000K 10W@230V	220-240V	I	468	90271100 M

















L'installazione comporta l'utilizzo dell'apposito tirafondi in acciaio INOX (fornito con l'apparecchio).

È necessario prevedere un getto di cemento sotto al prodotto per garantirne la stabilità; è bene verificare la possibilità di installazione in base alla tipologia di superficie disponibile.

Ulisse ha un peso di circa 14Kg, pertanto è indispensabile effettuare un piccolo getto in cemento per dare stabilità all'installazione ed è altresì fondamentale seguire precisamente ogni passaggio dell'installazione per garantire anche l'impatto estetico del prodotto.

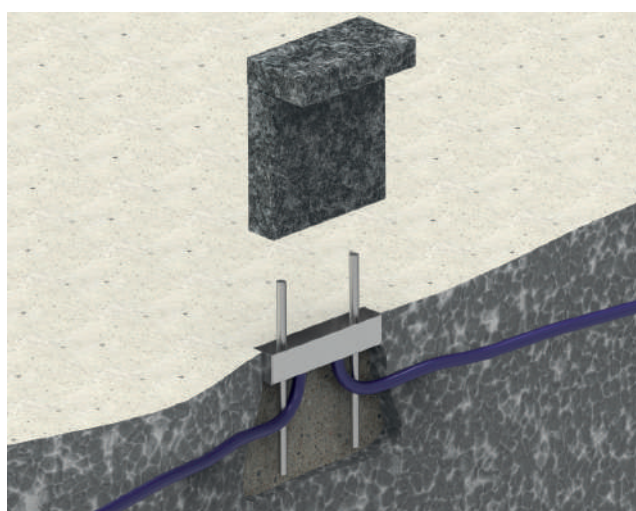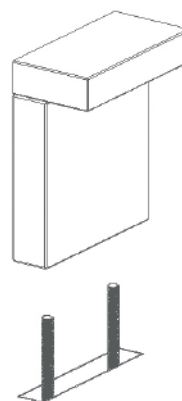

The installation requires the use of the dedicated stainless steel anchor bolts (supplied with the fixture).

A concrete foundation must be provided beneath the product to ensure stability, and the suitability of the installation must be verified according to the type of surface available.

Ulisse weighs approximately 14 kg; it is mandatory to prepare a small concrete foundation to provide stability to the installation. It is also extremely important to follow each installation step precisely in order to preserve the aesthetic impact of the product.

