

Cono Trimless Series




Cono Trimless downlight is designed to be recessed and plastered into ceilings providing a seamless and smooth finish after installation. The deep aluminium body provides a comfortable optic, reducing excess glare. The ultimate in minimalist recessed downlights Cono Trimless is the ideal luminaire for use in residential, commercial and retail spaces.

IP44     

Cono Round - Trimless




Dimensions	165mm x 62mm
Finish	White (WH) / Black (BK) / Custom Colour (CC)
Configurations	Ceiling Recessed
Code / Description	176B / Round Plaster Recessed Trimless Frame
Rating	IP44

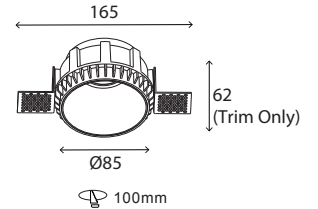

Accessories

Globes	GU10 LED Smart Wi-Fi Globe Tunable White - Colour Changing
Controller	Wi-Fi Controller for Smart Globe (Up to 50 Globes)
Lamp Base	GU10 base with Connection Box

Trimless Frame Installation

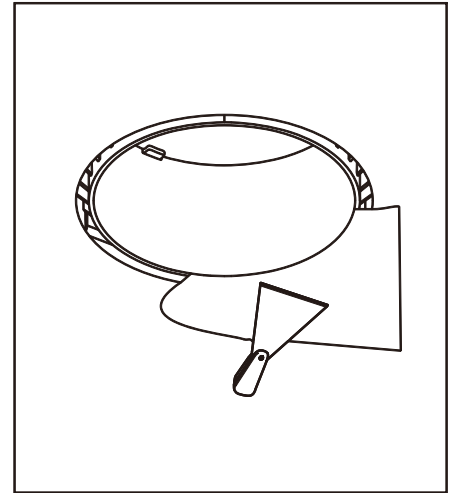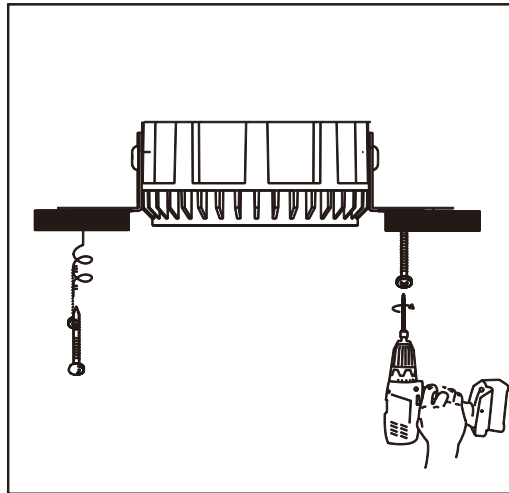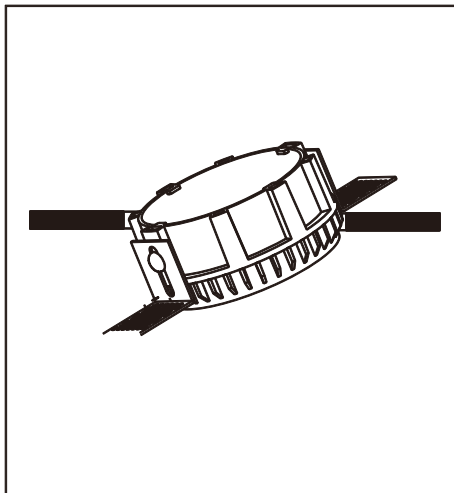


Additional Information


This product comes in our standard colour range however can be colour-customised to seamlessly integrate into your space. Minimum order quantities apply. For more information please contact our customer service team on +61 3 9427 0231 or email info@sphera.com.au

LED Modules


Code / Description	LML063060LEDDIM - 3000K 6W Dimmable 36° Low Profile Module
Lumen Output	700lm
CRI	90+
Lifespan	50000hrs
Dimming	Phase-Cut
Voltage	220-240V
Options	DALI, Casambi



Code / Description	LMR063060LEDDIM - 3000K 6W Dimmable 60° Low Profile Module
Lumen Output	700lm
CRI	90+
Lifespan	50000hrs
Dimming	Phase-Cut
Voltage	220-240V
Options	DALI, Casambi

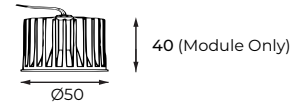

Code / Description	LMR12TW60LEDIM - 2700K 3000K 4000K 12W Dimmable 60° Module
Lumen Output	900lm
CRI	90+
Lifespan	50000hrs
Dimming	Phase-Cut
Voltage	220-240V
Options	DALI, Casambi Beam Angle 15° 24° 38°

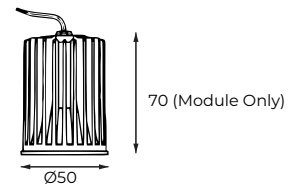

Code / Description	LMR17TW60LEDIM - 2700K 3000K 4000K 17W Dimmable 60° Module
Lumen Output	1100lm
CRI	90+
Lifespan	50000hrs
Dimming	Phase-Cut
Voltage	220-240V
Options	DALI, Casambi Beam Angle 15° 24° 38°

