

## Deck




Deck, as the name suggests is a recessed uplighter perfectly suited for decks due to its extremely shallow depth. A durable and long lasting fixture, Deck features a stainless steel trim and flush tempered glass making it also suitable for recessing into concrete. Available in a range of wattages and sizes Deck is an extremely energy efficient way to illuminate decks, pathways and driveways.

**IP67**    

## Deck - 2W

Dimensions	Ø58mm x 43mm
Finish	Stainless Steel (SS) / Custom Colour (CC)
Configurations	Inground Uplight
Code / Description	710230 / Warm White 3000K 2W 35°
Light Source	LED
Lumen Output	158lm
CRI	90+
Lifespan	50000hrs
Rating	IP67
Voltage	24Vdc

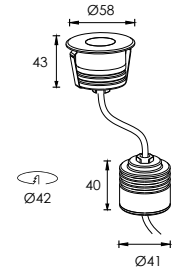

## Options


Beam Angle	Asymmetrical 45°
Colour Temperature	4000K / 5000K
Voltage	Mains 240V
Dimming	Phase-Cut 1-10V / DALI

## Additional Information

This product comes in our standard colour range however can be colour-customised to seamlessly integrate into your space. Minimum order quantities apply. For more information please contact our customer service team on +61 3 9427 0231 or email [info@sphera.com.au](mailto:info@sphera.com.au)

## Deck - 3x2W

Dimensions	Ø116mm x 38mm
Finish	Stainless Stell (SS) / Custom Colour (CC)
Configurations	Inground Uplight
Code / Description	713X230 / Warm White 3000K 3x2W
Light Source	LED
Lumen Output	3x158lm
CRI	90+
Lifespan	50000hrs
Rating	IP67
Voltage	24Vdc

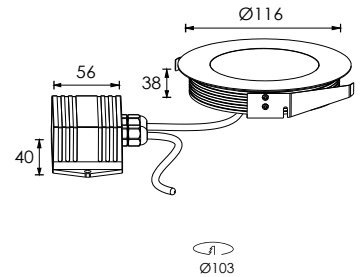

## Options


Beam Angle	Asimmetrical 45°
Colour Temperature	4000K / 5000K
Voltage	Mains 240V
Dimming	Phase-Cut 1-10V / DALI

## Additional Information

This product comes in our standard colour range however can be colour-customised to seamlessly integrate into your space. Minimum order quantities apply. For more information please contact our customer service team on +61 3 9427 0231 or email [info@sphera.com.au](mailto:info@sphera.com.au)

## Deck - 6x2W

Dimensions	Ø173mm x 38mm
Finish	Stainless Stell (SS) / Custom Colour (CC)
Configurations	Inground Uplight
Code / Description	716X230 / Warm White 3000K 6x2W
Light Source	LED
Lumen Output	6x158lm
CRI	90+
Lifespan	50000hrs
Rating	IP67
Voltage	24Vdc

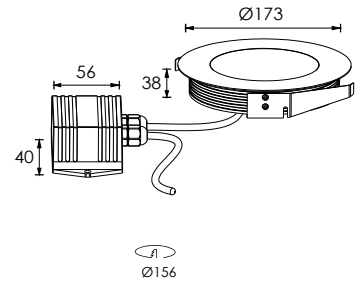

## Options

Beam Angle	Asimmetrical 45°
Colour Temperature	4000K / 5000K
Voltage	Mains 240V
Dimming	Phase-Cut 1-10V / DALI

## Additional Information

This product comes in our standard colour range however can be colour-customised to seamlessly integrate into your space. Minimum order quantities apply. For more information please contact our customer service team on +61 3 9427 0231 or email [info@sphera.com.au](mailto:info@sphera.com.au)