



The practical hinged cover design offers ease of installation and hassle-free maintenance and, when integrated with the optional microwave dimming motion sensor, it can save end-users up to 70% in energy costs, making ExcalibreWP perfect for car parks, stairwells, warehouses and other outdoor emergency escape paths.

IP65




20W Tri-Colour LED 600mm Emergency Batten

Technical Specifications

Item	Part Number	EMS-BATT0620WP
	Description	20W Tri-Colour LED 600mm Multimode IP65 IK10 Weatherproof Emergency Batten c/w Synthium™ Battery
Input	Voltage & Frequency	230VAC ; 50Hz
	Installation	Large terminal block, 20mm ² cable entry
Output	Light Source	20W 2500lm Tri-Colour LED Array (4000K, 5000K, 6000K)
	Mode of Operation	Multimode - Maintained / Non-Maintained
	Power Consumption	22W (Maintained), 3W (Non-Maintained)
	Emergency Duration	>120 Minutes
Controls	Charger	16hr intelligent 3-stage charger with Advanced Synthium™ battery
	Protection	Overcharge, low voltage disconnect, overcurrent, short circuit
	Testing Facility	Manual test switch
	Indicators	Battery charging green LED
Physical	Construction	Diffuser - High transmission opal polycarbonate, chassis - polycarbonate
	Mounting	Surface mounted - ceiling / wall
	Dimensions L x W x H	665mm x 115mm x 90mm
	IP / IK Rating	IP65 / IK10
	Weight	2.0 kg
	Warranty	3 Years
Environment	Operating Temperature	1° to 40°C
	Relative Humidity	0 to 95%
Compliance	Standards	RCM / EMC, A S/NZS 2293, A S/NZS 60598.1, SAA Approval SAA140984
	AS/NZS 2293 Classification	C0 D63, C90 D40
Accessories	Microwave Dimming Sensor	P/N: EMS-BATT0620WP/MWS
	STAR™ Self-Test and Reporting	P/N: EMS-BATT0620WP/ST
	DALI-compatible	P/N: EMS-BATT0620WP/DLI
	SYNECTIX™ RF Wireless	P/N: EMS-BATT0620WP/RF
	Replacement Battery	P/N: BAT-BATTWP: Synthium™ LiFePO ₄

NOTE: Product specifications subject to change without prior notice due to ongoing product improvement policy and changes to industry standards.

Dimensions

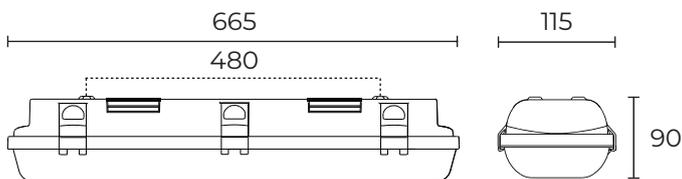

Spacing Table

		Mounting Height (m)								
NATA Classification		2.1	2.4	2.7	3.0	4.0	5.0	6.0	8.0	10.0
EMS - BATT0620WP	C0 - D63	11.5	13.2	14.8	16.5	22.1	21.1	22.1	23.0	23.0
	C90 - D40	11.5	13.2	14.8	16.5	20.1	21.3	22.1	23.0	23.1