


## Exodus Blade - Recessed

Item	Part Number	EXS - BLADE
	Description	LED One Box solution recessed mounted Blade Exit Light c/w Synthium Battery
Input	Voltage & Frequency	230VAC ; 50 HZ
	Installation	Complete with 1.2m flex cable and plug
Output	Light Source	High efficiency LED strip, 50,000 hours
	Mode of Operation	Maintained
	Power Consumption	4W { standby }
	Emergency Duration	>120 Minutes
Controls	Charger	Intelligent 3-stage charger with Synthium™ battery management system
	Protection	Overcharge, low voltage disconnect, overcurrent, short circuit
	Testing Facility	Manual test switch
	Indicators	Battery charger green LED
Physical	Diffuser	All variations of Running Man pictogram
	Construction	Flame-retardant polycarbonate
	Mounting	Recessed mounted, 430mm x 75mm cutout
	Dimensions L x W x H	475mm x 100mm x 200mm
	IP Rating	IP20
	Weight	1.5kg
Environment	Operating Temperature	1° to 40° C
	Relative Humidity	0 to 95%
Compliance	Standards	RCM / EMC, AS/NZS 2293, AS/NZS 60598.1
	AS/NZS 2293 Classification	CO D6.3 C90 E3.2
Accessories	Replacement Battery	P/N: BAT-BLADE: Synthium™ LiFePO4

NOTE: Product specifications subject to change without prior notice due to ongoing product improvement policy and changes to industry standards.

### Dimensions

EXS-BLADE (Recessed):

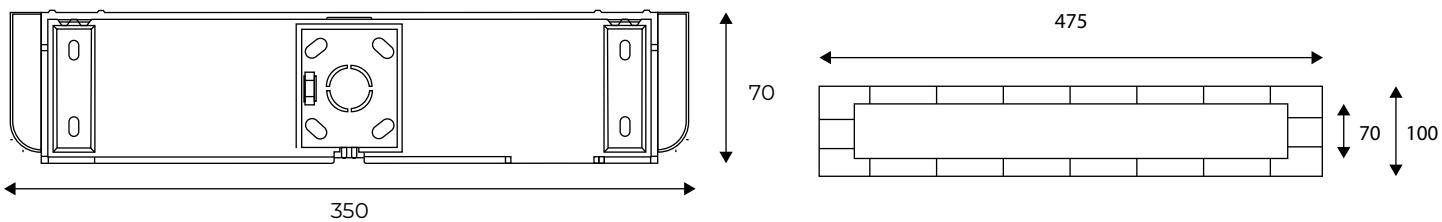

### AS/NZS 2293.1:2018 Spacing Table

This product performs the dual role as a 24m Exit Sign and an Emergency luminaire with the following NATA-accredited emergency classifications:

SPACING TABLE	MOUNTING HEIGHT (m)			
NATA Classification	2.1	2.4	2.7	3.0*
CO - D6.3	8.5	8.8	8.9	9.1
C90 - D3.2	6.5	6.5	6.5	6.5

\* Maximum mounting height allowed is 2.7m but for exceptions see AS2293.1 2018.