
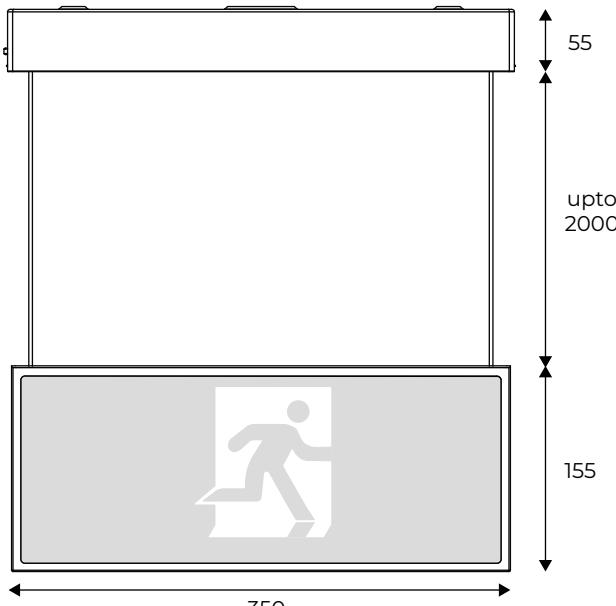


Exodus Pendant

Item	Part Number	E XS -P E NDANT
	Description	LED One Box Solution Suspended Mount Edge-Lit Exit Light c/w Synthium Battery
Input	Voltage & Frequency	230VAC ; 50Hz
	Installation	Large terminal block and 20mm cable entry
Output	Light Source	High performance LED bar, 100,000 hours
	Mode of Operation	Maintained
	Power Consumption	2W (standby)
	Emergency Duration	> 120 minutes
Controls	Charger	Intelligent 3-stage charger with Synthium™ battery management system
	Protection	Overcharge, low voltage disconnect, overcurrent, short circuit
	Testing Facility	Manual test switch
	Indicators	Battery charger green LED
Physical	Diffuser	All variations of Running Man pictogram
	Construction	Flame-retardant polycarbonate
	Mounting	Ceiling surface mounted bracket with 2m suspension wire kit
	Dimensions L x W x H	350mm x 70mm x 210mm
	IP Rating	IP20
	Weight	1.5kg
Environment	Operating Temperature	1° to 40°C
	Relative Humidity	0 to 95%
Compliance	Standards	RCM / EMC, AS/NZS 2293, AS/NZS 60598.1
	AS/NZS 2293 Classification	CO D6.3 C90 E3.2
Accessories	STAR™ Self-Test and Reporting	P/N: EXS-TREX / ST
	DALI-compatible	P/N: EXS-TREX / DL
	SYNECTIX™ RF Wireless	P/N: EXS-TREX / RF
	Replacement Battery	P/N: BAT-BLADE: Synthium™ LiFePO4

NOTE: Product specifications subject to change without prior notice due to ongoing product improvement policy and changes to industry standards.

Dimensions

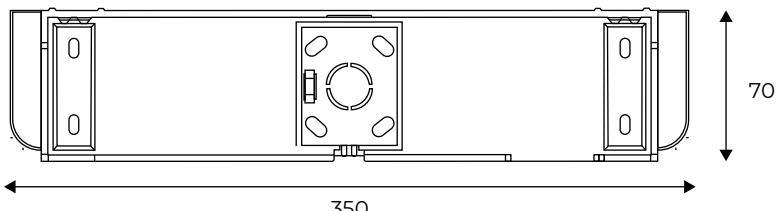

AS/NZS 2293.1:2018 Spacing Table

This product performs the dual role as an 24m Exit Sign and an Emergency luminaire with the following NATA-accredited emergency classifications:

SPACING TABLE	MOUNTING HEIGHT (m)			
NATA Classification	2.1	2.4	2.7	3.0*
CO - D6.3	8.5	8.8	8.9	9.1
C90 - D3.2	6.5	6.5	6.5	6.5

* Maximum mounting height allowed is 2.7m but for exceptions see AS2293.1 2018.