

Exodus Emergensee Pro


Item	Part Number	EMS - PRO
	Description	D80 LED Recessed Non-Maintained Emergency Light c/w Synthium Battery
Input	Voltage & Frequency	230VAC ; 50 HZ
	Installation	Complete with 1.2m Flex cable & Plug
Output	Light Source	High efficiency LED with Cyclops optical lens- Lifetime warranty
	Mode of Operation	Non-Maintained
	Power Consumption	2W { standby }
	Emergency Duration	>120 Minutes
Controls	Charger	16hr Intelligent 3-stage charger with Synthium™ battery management system
	Protection	Overcharge, low voltage disconnect, overcurrent, short circuit
	Testing Facility	Manual test switch
	Indicators	Battery charger green LED
Physical	Construction	Flame-retardant polycarbonate
	Mounting	Recessed - Ceiling, 70-150mm cut-out
	Dimensions L x W x H	Disc: 100mm or 160mm diameter
	IP Rating	IP20
	Weight	1.0kg
	Warranty	5 years on product
Environment	Operating Temperature	1° to 40° C
	Relative Humidity	0 to 95%
Compliance	Standards	RCM / EMC, AS/NZS 2293, AS/NZS 60598.1
	AS/NZS 2293 Classification	CO D80 C90 D80
Accessories	STAR™ Self-Test and Reporting	P/N: EMS-POD/ST
	DALI-compatible	P/N: EMS-POD/DL
	SYNECTIX™ RF Wireless	P/N: EMS-POD/RF
	Replacement Battery	P/N: BAT-POD: Synthium™ LiFePO4

4



NOTE: Product specifications subject to change without prior notice due to ongoing product improvement policy and changes to industry standards.

Dimensions

Recessed Disc:



Controller:

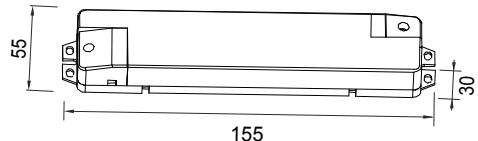

AS/NZS 2293.1:2018 Spacing Table

SPACING TABLE	MOUNTING HEIGHT (m)								
NATA Classification	2.1	2.4	2.7	3.0	4.0	5.0	6.0	8.0	10.0
CO - D80	11.5	13.2	14.8	16.5	22.0	27.5	28.9	30.9	32.1
C90 - D80	11.5	13.2	14.8	16.5	22.0	27.5	28.9	30.9	32.1