
512.22 Pendant



Designed by Roberto Giacomucci

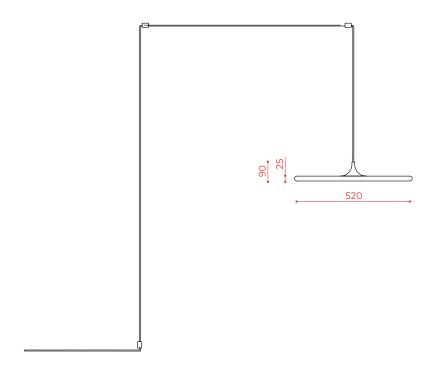

unit mm

Series Certifications Class

Bilancella **RCM** Insulation class 1

Dimensions

Degree of protection IP40 H.2,5 x Ø 52 cm / H.1" x Ø 20,5"

Finishes Source Weight Source Type: Integrated LED Hardware: C74 Sand black

6 kg / 13,2 lb Power: 40W Color Temperature: 2700K Materials

Nominal Flux: 3200 lm Metal Dimmability: phase cut

Voltage Notes

Additional ceiling attachment available

Pendant lamp with structure made of metal by a circular diffuser plate and cable holders for wall anchoring, which allow to adapt to any space. Supplied with 8 meters fabric cable and three celing attachments.

ABOUT

220-240V

Suspension, ceiling and wall lamp with a thin metal powder coated diffuser. The decentrate version has a versatile ceiling mounting system allowing to illuminate even in absence of electrical connection on the ceiling. In addition, the metal decentralizers allow the wire to slide to bring the light where it is needed. Thanks to its essential form, the light spreads evenly throughout the environment.

TOOY www.sphera.com.au