


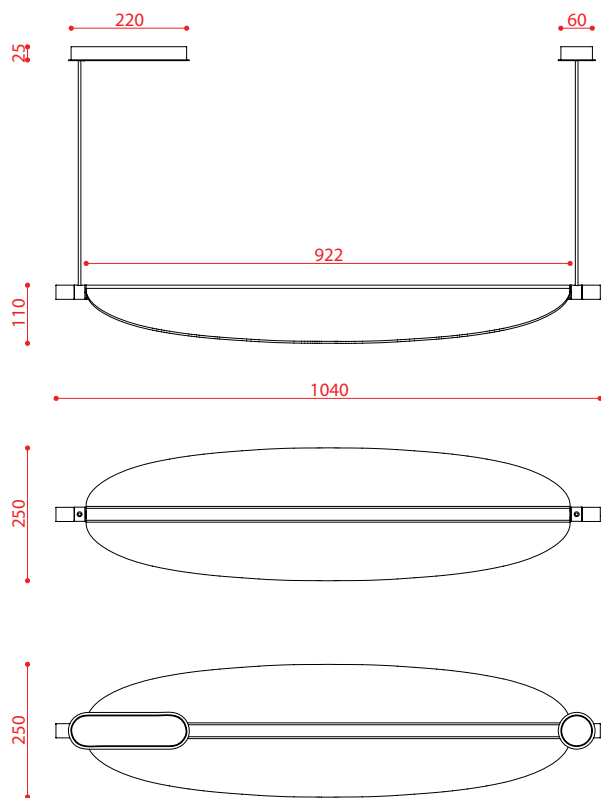

unit mm

Designed by Federica Biasi

Series Thula	Certifications RCM	Class Insulation class 1 Degree of protection IP40
Dimensions H. 110 x W. 250 x L. 1040 / H. 4.3" x L. 40.9"	Source Intergrated LED Wattage: 20 W Dimmability: TRIAC Lumens: 2600 lm Colour Temperature: 2700K Cable: 1500mm	Finishes Hardware: C22 Beige + C22 Beige, C22 Beige + C68 Satin nickel, C74 Sand black + C74 Sand black, C74 Sand black + C68 Satin nickel
Weight 2.5 kg / 5.5 lb		
Materials aluminium, metal, leather, wood		
Voltage 110 / 240V	Notes DALI version available on request	Shade: L02 Beige leather, W02 Canaletto walnut, W03 Light oak
 IP40		

Structure made of aluminum and epoxy powder coated metal to which an organic component in wood or quilted leather is added. Composed of a dimmable linear LED. Version with cable and plug available on request. Remote driver.

ABOUT

Designed by Federica Biasi, the Thula appliques and suspension lamps are based on a simple and architectural central element with an illuminating function to which an organic component in wood or quilted leather is added in a skillful game of addition and subtraction. Consists of a linear dimmable LED; in the simple wall version it can be oriented, thus giving direct or indirect light.