


562.23 Sospensione - Pendant

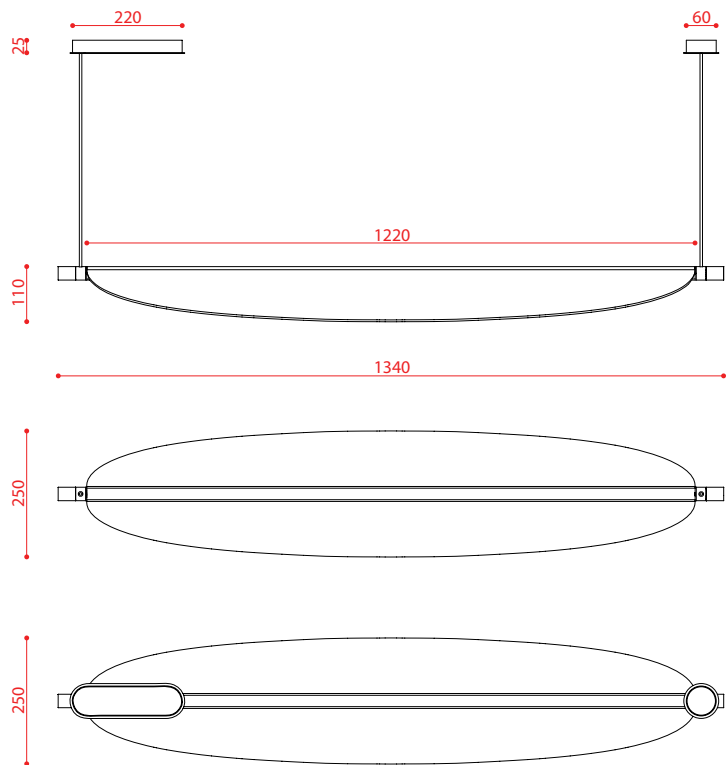

unit mm

Designed by Federica Biasi

Series Thula	Certifications RCM	Class Insulation class 1 Degree of protection IP40
Dimensions H. 110 x W. 250 x L. 1340 / H. 4.3" x L. 52.8"	Source Intergrated LED Wattage: 26 W Dimmability: TRIAC Lumens: 3400 lm Colour Temperature: 2700K Cable: 1500mm	Finishes Hardware: C22 Beige + C22 Beige, C22 Beige + C68 Satin nickel, C74 Sand black + C74 Sand black, C74 Sand black + C68 Satin nickel
Weight 3.2 kg / 7.1 lb		Shade: L02 Beige leather, W02 Canaletto walnut, W03 Light oak
Materials aluminium, metal, leather, wood	Notes DALI version available on request	
Voltage 110 / 240V		
⚡ ⚡ IP40		

Structure made of aluminum and epoxy powder coated metal to which an organic component in wood or quilted leather is added. Composed of a dimmable linear LED. Version with cable and plug available on request. Remote driver.

ABOUT

Designed by Federica Biasi, the Thula appliques and suspension lamps are based on a simple and architectural central element with an illuminating function to which an organic component in wood or quilted leather is added in a skillful game of addition and subtraction. Consists of a linear dimmable LED; in the simple wall version it can be oriented, thus giving direct or indirect light.